


British DX Club

South Asia on Mediumwave and Shortwave

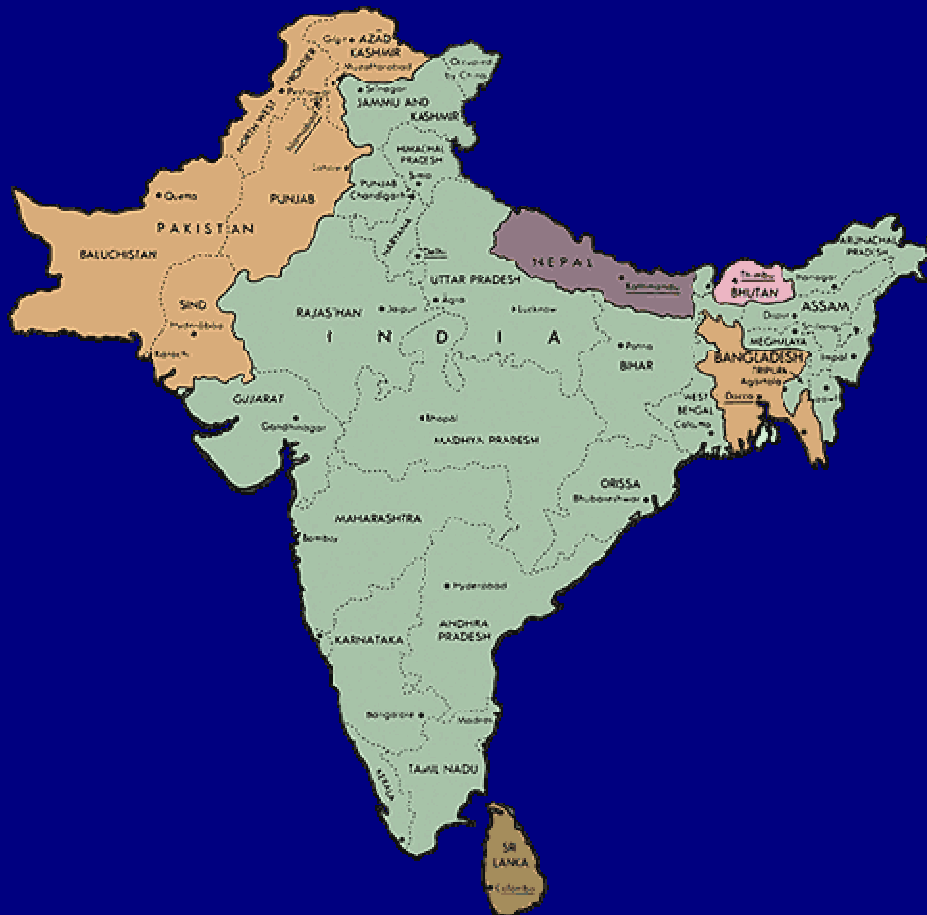

**Guide to broadcasting stations on
mediumwave and shortwave in South Asia
including a comprehensive frequency order list
of mediumwave radio stations in the region**

March 2017

Bangladesh

Bangladesh Betar

Bangladesh Betar is the state broadcasting service of Bangladesh. Domestic services are currently aired throughout the country on mediumwave, shortwave and FM.

Bangladesh Betar on mediumwave

kHz	Location	kW	Schedule (UTC)
558	Khulna	100	0030-0400, 0600-1710 in Bengali, with news in English at 0200, 1100, 1530; SAARC News: 1235mo in Bengali, 1250mo in English; Local News: 0210 & 1300 in Bengali, 1205 in English.
630	Savar, Dhaka-B	100	0000-0145, 0300-1710, 1800-2100 in Bengali; with news in English at 1805; SAARC News: 1235mo in Bengali, 1250mo in English
693	Dhamrai, Dhaka-A	100	00030-0610, 0830-1710 in Bengali, with news in English at 1100, 1530; SAARC News: 1235mo in Bengali, 1250mo in English; L. News: 1300 Bengali
819	Dhaka	100	new transmitter testing
846	Rajshahi	100	0030-0400, 0600-1710 in Bengali, with news in English at 0200, 1100, 1530; SAARC News: 1235mo in Bengali, 1250mo in English; Local News: 0210, 0610 & 1300 in Bengali
873	Chittagong	100	0030-0400, 0600-1710 in Bengali, with news in English at 0200, 1100, 1530; SAARC News: 1235mo in Bengali, 1250mo in English; Local News: 0210 & 0610 in Bengali, 1225 in Marma
963	Sylhet	20	0030-0400 and 0800-1710 in Bengali, with news in English at 0200, 1100, 1530; SAARC News: 1235mo in Bengali, 1250mo in English
999	Thakurgaon	10	0950-1710 in Bengali, with news in English at 1100, 1530; SAARC News: 1235mo in Bengali, 1250mo in English
1053	Rangpur	10	0030-0400, 0800-1710 in Bengali, with news in English at 0200, 1100, 1530; SAARC News: 1235mo in Bengali, 1250mo in English
1080	Rajshahi	10	0030-0400, 0600-1710 in Bengali, with news in English at 0200, 1205, 1530; SAARC News: 1235mo in Bengali, 1250mo in English; Local News: 0210, 0610 & 1300 in Bengali
1161	Rangamati	10	0530-1030 in Bengali
1170	Kallyanpur, Dhaka-C	20	0900-1100 in Bengali
1287	Barisal	10	0445-1115 in Bengali, with news in English at 1100
1314	Cox's Bazar	10	0545-1045 in Bengali
1413	Comilla	10	1000-1710 in Bengali, with news in English at 1100, 1530; SAARC News: 1235mo in Bengali, 1250mo in English
1431	Bandorban	10	0530-1030 in Bengali

Bangladesh Betar on shortwave - Home Service

The current 100 kW shortwave transmitter was inaugurated in 2006.

Transmitter Site: Shavar - 100 kW.

Frequency: 4750 kHz

Bangladesh Betar on 4750 kHz has been observed on the air only for short periods during August 2016, e.g. at 1155-1206, 1254-1307, 1651-1705. The transmitter carries the main news bulletin then goes off air, as per observations by Ron Howard/dxld and Anker Petersen.

Bangladesh Betar - External Service

Bangladesh Betar's External Service had in recent years operated on two shortwave frequencies in the 41 and 31 metre-bands (7250 and 9550 kHz). This was reduced to just one frequency (7250 kHz) and from early 2010 was not heard at all, probably due to the remaining transmitter being in a state of disrepair. However, during 2012 a new Thomson 250 kW shortwave transmitter and rotatable antenna system was installed at Khabirpur with tests first heard in August 2012 followed by a regular schedule.

Transmitter Site: Kharbirpur - 250 kW.

Time/UTC	Language	Target	kHz
1230-1300	English	South & South-East Asia	15105
1315-1345	Nepali	Nepal	9455
1400-1430	Urdu	Pakistan	15505
1515-1545	Hindi	India	15505
1600-1630	Arabic	Middle East	7250
1630-1730	Bengali	Middle East	7250
1745-1900	English	Europe	13580
1915-2000	Bengali	Europe	13580



Bhutan

Bhutan Broadcasting Service

Radio Broadcasting was started by a group of young volunteers, known as the National Youth Association of Bhutan (NYAB) in November 1973. The station was operational only on Sundays with 30 minutes of news and music. The NYAB club office was transformed to radio studio at weekends. The 400-watt transmitter was rented from the local telegraph office. The station was called Radio NYAB. In 1979, the Royal Government recognizing the importance of the radio for development communication, incorporated the station under the Ministry of Communications. In 1986 with the commissioning of a 10 kW shortwave transmitter and a small broadcast studio, Radio NYAB was renamed as Bhutan Broadcasting Service (BBS). In March 1991, BBS acquired its permanent seat in Chubachu, Thimphu, and a 50 kW shortwave transmitter. In August 2007, a 100 kW shortwave transmitter with DRM capability was commissioned. BBS radio broadcasts for 15 hours daily from 6 am to 6.30 pm local time in four languages (Dzongkha, Sharchop, Lhotsamkha and English).

Transmitter Site: Thimpu - 100 kW

Time/UTC	Language	kHz
0000-0300 (0600-0900 BTT)	Dzongkha	6035
0300-0400 (0900-1000 BTT)	Sharchop	6035
0400-0500 (1000-1100 BTT)	Lhotsam	6035
0500-0600 (1100-1200 BTT)	English	6035
0600-0700 (1200-1300 BTT)	Sharchop	6035
0700-0800 (1300-1400 BTT)	Dzongkha	6035
0900-1000 (1500-1600 BTT)	Sharchop	6035
1000-1100 (1600-1700 BTT)	Lhotsam	6035
1100-1230 (1700-1830 BTT)	Dzongkha	6035



Diego Garcia

BFBS and **AFRTS** both operate FM stations on Diego Garcia. All AFRTS mediumwave and shortwave transmitters on Diego Garcia are inactive. AFRTS was last heard on 4319 kHz in December 2014.

India

All India Radio

All India Radio (abbreviated as AIR), officially known as Akashvani, is the radio broadcaster of India and a division of Prasar Bharati (Broadcasting Corporation of India), an autonomous corporation of the Ministry of Information and Broadcasting, Government of India. It was established in 1936. All India Radio is one of the largest radio networks in the world. Some of the channels that currently feature on mediumwave and shortwave frequencies are as follows:

All India Radio - National Channel

All India Radio offers a 3 tier system of broadcasting, namely National, Regional and Local. Started on 18 May 1988, the National channel of All India Radio works as a night service from 6.50 pm to 6.10 am the next morning. It covers 64% area and about 76% population of the country, through its two MW transmitters at Delhi (1215 kHz) and Nagpur (1566 kHz), with shortwave support on 9380 kHz which covers the entire country. Having the whole of India as its zone, the programme complexion of the channel has been designed to make it representative of the varied cultural morale and ethos of the Nation as a whole.

All India Radio - FM Gold

FM Gold is a radio channel of All India Radio. It is heard in Delhi, Mumbai, Kolkata, Chennai. It can also be heard on DTH platform. The programme content of FM Gold and its sister station, FM Rainbow, is mainly popular Indian and Western music, compered in a vivacious and contemporary style and therefore highly popular with the urban youth. News bulletins and current affairs programmes are also broadcast. A relay of FM Gold is currently carried on shortwave via a transmitter at Chennai.

All India Radio - FM Rainbow

FM Rainbow is a group of FM radio channels across India. The group of stations was previously called FM Metro, but the name was changed to FM Rainbow in 2002. The group is run by All India Radio. It features Hindi and regional language songs, while also playing English music and providing hourly news in English, a regional language and/or Hindi

All India Radio - Vividh Bharati

One of the most famous services of the AIR is the Vividh Bharati Seva (roughly translating to "Multi-Indian service"). Vividh Bharati celebrated its Golden Jubilee on 3 October 2007. Vividh Bharati has the only comprehensive database of songs from the so termed "Golden Era" of Hindi film music (roughly from 1940s to 1980s). This service is the most commercial of all and is popular in Mumbai and other cities of India.

All India Radio - Uttarakhand Programme

On 9 November 2000 Uttarakhand (formerly Uttaranchal) was carved out of Uttar Pradesh as a separate state. All India Radio has a dedicated programme for the region that originates from its studios in Delhi and is aired on shortwave during the morning and evening periods

All India Radio Regional Services

All India Radio has five regional services - North, North-East, East, South and West. They broadcast in Hindi, English and the principal languages of the respective states and Union Territories (such as Assamese, Bengali, Gujarati, Kannada, Kashmiri, Malayalam, Marathi, Oriya, Punjabi, Sindhi, Tamil, Telegu and Urdu). As well as programmes originating from regional studios, the Regional Services also relay certain news broadcasts and Network programmes from Delhi (Network programmes may consist of entertainment, education, and health information of importance to the community).

All India Radio Home News

Home News broadcasts from All India Radio's Delhi studios are targeted at states and Union Territories in English, Hindi and other principal languages. They are broadcast at specific times each day and may be relayed on the All India Radio National Channel (Hindi and English news on 9380 kHz) and by various All India Radio regional stations on mediumwave and shortwave as follows:

All India Radio Home News morning schedule

0030-0035 (0600-0605 IST)	Hindi	0230-0245 (0800-0815 IST)	Hindi
0035-0040 (0605-0610 IST)	English	0245-0300 (0815-0830 IST)	English
0125-0130 (0655-0700 IST)	Sanskrit	0300-0310 (0830-0840 IST)	Dogri
0130-0135 (0700-0705 IST)	Hindi	0300-0310 (0830-0840 IST)	Marathi
0135-0145 (0705-0715 IST)	Assamese	0300-0310 (0830-0840 IST)	Punjabi
0135-0145 (0705-0715 IST)	Telugu	0310-0320 (0840-0850 IST)	Sindhi
0145-0155 (0715-0725 IST)	Oriya	0320-0335 (0850-0905 IST)	Urdu
0145-0155 (0715-0725 IST)	Tamil	0330-0335 (0900-0905 IST)	Hindi
0155-0205 (0725-0735 IST)	Bengali	0335-0340 (0905-0910 IST)	English
0155-0205 (0725-0735 IST)	Malayalam	0340-0345 (0910-0915 IST)	Hindi States News
0205-0215 (0735-0745 IST)	Kannada	0345-0350 (0915-0920 IST)	Hindi Vikas Yatra
0215-0225 (0745-0755 IST)	Gujarati	0350-0355 (0920-0925 IST)	English announcements
0215-0225 (0745-0755 IST)	Kashmiri		

All India Radio Home News afternoon schedule

0700-0710 (1230-1240 IST)	Telugu	0800-0810 (1330-1340 IST)	Marathi
0710-0720 (1240-1250 IST)	Tamil	0810-0820 (1340-1350 IST)	Assamese
0720-0730 (1250-1300 IST)	Malayalam	0810-0820 (1340-1350 IST)	Punjabi
0730-0735 (1300-1305 IST)	English	0820-0830 (1350-1400 IST)	Oriya
0735-0740 (1305-1310 IST)	Hindi	0820-0830 (1350-1400 IST)	Urdu
0740-0750 (1310-1320 IST)	Kannada	0830-0900 (1400-1430 IST)	English
0750-0800 (1320-1330 IST)	Gujarati	0900-0930 (1430-1500 IST)	Hindi
0800-0810 (1330-1340 IST)	Bengali		

All India Radio Home News evening schedule

1115-1130 (1645-1700 IST)	Arunachali	1345-1400 (1915-1930 IST)	Dogri
1130-1135 (1700-1705 IST)	Hindi	1355-1405 (1925-1935 IST)	Nepali
1135-1140 (1705-1710 IST)	English	1355-1405 (1925-1935 IST)	Malayalam
1230-1235 (1800-1805 IST)	English	1405-1415 (1935-1945 IST)	Bengali
1235-1240 (1805-1810 IST)	Hindi	1405-1415 (1935-1945 IST)	Kannada
1240-1245 (1810-1815 IST)	Sanskrit	1420-1430 (1950-2000 IST)	Gujarati
1245-1255 (1815-1825 IST)	Sindhi	1430-1435 (2000-2005 IST)	English
1255-1310 (1825-1840 IST)	Kashmiri	1435-1440 (2005-2010 IST)	English Sports
1330-1335 (1900-1905 IST)	Hindi	1435-1445 (2005-2015 IST)	Marathi
1335-1340 (1905-1910 IST)	Hindi Sports	1515-1530 (2045-2100 IST)	Hindi
1335-1345 (1905-1915 IST)	Assamese	1530-1545 (2100-2115 IST)	English
1335-1345 (1905-1915 IST)	Telugu	1546-1600 (2116-2130 IST)	Urdu
1345-1355 (1915-1925 IST)	Oriya	1730-1735 (2300-2305 IST)	English
1345-1355 (1915-1925 IST)	Tamil	1735-1740 (2305-2310 IST)	Hindi

All India Radio on Mediumwave

All India Radio has many services in a number of languages, each serving different regions across India. Several mediumwave transmitters are now scheduled to carry out both analogue and digital transmissions.

Frequencies marked in blue are in DRM

kHz	Station	Location	kW	Programme/Schedule (UTC)
531	AIR Jodhpur-A	Jodhpur, Rajasthan	300	AIR North: 0025-0415(0530su), 0630-0945, 1130-1740
540	AIR Aizawl	Aizawl, Mizoram	20	AIR North-East: 0025-0400, 0700-0930(1000su), 1130-1630
549	AIR Ranchi-A	Ranchi, Jharkhand	100	AIR East: 0025-0445(0455su), 0630-1000, 1000-1100su, 1100-1741
558	AIR Mumbai-B AIR Ranchi-A	Mumbai, Maharashtra Ranchi, Jharkhand	100 DRM	Asmita Channel: 2355-1035, 1130(1200su)-1800 FM Rainbow, Delhi
567	AIR Dibrugarh	Dibrugarh, Assam	300	AIR North-East: 0000-0505(0550su), 0630-0930, 1000-1700(up to 1740su)
	AIR Mumbai-B	Mumbai, Maharashtra	DRM	DTH Marathi
576	AIR Alappuzha	Alappuzha, Kerala	200	0020-0430, 0430-0630sa/su, 0630-1000, 1000-1130sa/su, 1130-1740
	AIR Dibrugarh	Dibrugarh, Assam	DRM	Vividh Bharati, Mumbai
585	AIR Nagpur-A	Nagpur, Maharashtra	300	AIR West: -0500, 0700-, 1130(1200su)-1740
594	AIR Chinsurah	Chinsurah, West Bengal	1000	0030-0230 Akashvani Moitree in Bengali 0230-0245 Home News in Hindi 0245-0300 Home News in English 0300-0830 Akashvani Moitree in Bengali 0830-0845 Home News in English 0845-0900 Home News in Hindi 1000-1515 Akashvani Moitree in Bengali 1515-1530 Home News in Hindi 1530-1545 Home News in English 1545-1600 Spotlight in English 1600-1730 Akashvani Moitree in Bengali
603	AIR Ajmer AIR Chinsurah	Ajmer, Rajasthan Chinsurah, West Bengal	200 DRM	AIR North: 0025-1200, 1330-1740 0030-0130 FM Rainbow, Delhi 0130-0230 External Sce in Nepali 0230-0700 FM Rainbow, Delhi 0700-0800 External Sce in Nepali 0800-0900 FM Rainbow, Delhi 1000-1100 GOS-II in English 1100-1215 FM Rainbow, Delhi 1215-1315 External Sce in Burmese 1315-1330 FM Rainbow, Delhi 1330-1430 External Sce in Nepali 1430-1730 FM Rainbow, Delhi
612	AIR Banguluru AIR Ajmer	Banguluru, Karnataka Ajmer, Rajasthan	200 DRM	AIR South: 0025-0435(0530su), 0700-0935, / 1200-1735 FM Rainbow, Delhi
621	AIR Patna AIR Banguluru	Patna, Bihar Banguluru, Karnataka	100 DRM	AIR East: 0025-1200, 1245-1742 FM Gold, Delhi
630	AIR Thrissur AIR Patna	Thrissur, Kerala Patna, Bihar	100 DRM	AIR South: -0345, 0625-0900, 1130-1735 FM Rainbow, Delhi
639	AIR Kohima	Kohima, Nagaland	100	AIR North-East: 2359-0520, 0700-0900, 0930-1600
648	AIR Indore-A	Indore, Madhya Pradesh	200	AIR West: 0025-0430, 0700-0935, 1130-1740
657	AIR Kolkata-A	Kolkata, West Bengal	200	AIR East: 0023-0530, 0630-1030, 1100-1740
666	AIR Delhi-B AIR Kolkata-A	Delhi, NCT Kolkata, West Bengal	100 DRM	Rajdhani Channel: 0025-0440 0700-, -1835 FM Gold, Delhi
675	AIR Bhadravathi	Bhadravathi, Karnataka	20	AIR South: 0025-0500, 0700(0600su)-0935, 1200-1740
	AIR Chhatarpur	Chhatarpur, Madhya Pradesh	100	AIR West: 0025-0430(0600su), 0700-0945, 1130-1740
684	AIR Itanagar AIR Kargil-A AIR Kozhikode-A AIR Port Blair	Itanagar, Arunachal Pradesh Kargil, Jammu & Kashmir Kozhikode, Kerala Port Blair, Andaman Is.	100 200 100 100	AIR North-East: 0020-0400, 0700-0900, / 1000-1630 AIR North: 1130-1630 AIR South: 0013-0400, 0658-0930, 1108-1735 AIR South: 2355-0300, 0315-0900, 1030-1700(1730ss)
	AIR Itanagar	Itanagar, Arunachal Pr.	DRM	FM Rainbow, Delhi

kHz	Station	Location	kW	Programme/Schedule (UTC)
702	AIR External Sce	Jalander, Punjab	200	0015-0430 in Urdu, 0800-0830 in Punjabi, 0830-1130 in Urdu, 1130-1230 in Punjabi, 1230-1300 in Saraiki, 1300-1430 in Punjabi, 1430-1930 in Urdu
711	AIR Siliguri	Siliguri, West Bengal	194	AIR East: 0025-0430(0500su), 0630-1000, 1145-1742
720	AIR Chennai-A AIR Siliguri	Chennai, Tamil Nadu Siliguri, West Bengal	200 6	AIR South: 0030-0530, 0630-1200, 1230-1740 FM Rainbow, Delhi
729	AIR Guwahati	Guwahati, Assam	100	AIR North-East: 0000-0415, 0600-0930, 0945-1145, 1200-1740
	AIR Chennai-A	Chennai, Tamil Nadu	DRM	Raagam Channel
738	AIR Hyderabad-A	Hyderabad, Telengana	200	AIR South: 0023-1740
747	AIR Lucknow	Lucknow, Uttar Pradesh	300	AIR North: 0023-0430, 0658-1000, 1213-1741
756	AIR Jagdalpur	Jagdalpur, Chhattisgarh	100	AIR West: 0025-0405(0430su), 0600-0930, 1200-1740
	AIR Lucknow	Lucknow, Uttar Pradesh	DRM	FM Gold, Delhi
765	AIR Dharwad	Dharwad, Karnataka	200	AIR South: 0030-0430, 0600-1005, 1200-1735
774	AIR Shimla	Shimla, Himachal Pradesh	100	AIR North: 0025-0410, 0700-0930, 1050-1740
	AIR Dharwad	Dharwad, Karnataka	DRM	FM Rainbow, Delhi
783	AIR Chennai-C	Chennai, Tamil Nadu	DRM	Ch 1 Vividh Bharati / Ch 2 FM Rainbow
792	AIR Pune	Pune, Maharashtra	100	AIR West: 0025-0525, 0700-1000, 1200-1740
801	AIR Jabalpur	Jabalpur, Madhya Pradesh	200	AIR West: 0025-0500, 0630-0945, 1130-1740
	AIR Pune	Pune, Maharashtra	DRM	FM Rainbow, Delhi
810	AIR Rajkot	Rajkot, Gujarat	300	AIR West: 0025-0430, 0700-, -1740
	AIR Jabalpur	Jabalpur, Madhya Pradesh	DRM	FM Rainbow, Delhi
819	AIR Delhi-A	Delhi, NCT	200	Indraprastha Channel: 0430-, -1045, 1125-1840
	AIR Rajkot	Rajkot, Gujarat	DRM	FM Rainbow, Delhi
828	AIR Silchar	Silchar, Assam	20	AIR North-East: schedule to be confirmed
	AIR Panaji	Goa, Panaji	20	Vividh Bharati: 0025-0435, 0530-1200, 1245-1740
	AIR Delhi-A	Delhi, NCT	DRM	FM Gold, Delhi
837	AIR Vijayawada	Vijayawada, Andhra Pradesh	100	AIR South: 0025-0530, 0630-1200, 1245-1742
846	AIR Ahmedabad	Ahmedabad, Gujarat	200	AIR West: 0025-1200 1245-1742
	AIR Vijayawada	Vijayawada, Andhra Pradesh	DRM	FM Gold, Delhi
855	AIR Ahmedabad	Ahmedabad, Gujarat	DRM	FM Rainbow, Delhi
864	AIR Shillong	Shillong, Meghalaya	100	AIR North-East: 0025-0430, 0700-1000, 1130-1630
873	AIR Jalandhar-A	Jalandhar, Punjab	300	AIR North: 0025-0430, 0630-0930, 1030-1740
882	AIR Imphal	Imphal, Manipur	300	AIR North-East: 0000-0500, 0630-1000, 0930-1600
	AIR Jalandhar-A	Jalandhar, Punjab	DRM	FM Gold, Delhi
891	AIR Rampur	Rampur, Uttar Pradesh	20	AIR North: 0025-0430, 0700(0630su)-0940, 1230-1742
900	AIR Kadapa	Kadapa, Andhra Pradesh	100	AIR South: 0030-, 1130-1742
909	AIR Gorakhpur	Gorakhpur, Uttar Pradesh	100	AIR North; schedule to be confirmed
918	AIR Suratgarh	Suratgarh, Rajasthan	300	AIR North: 0025-0350(0445su), 0700-0940, 1130-1740
927	AIR Vishakapatnam	Vishakapatnam, Andhra Prad.	100	AIR South: 0030-0430, 0545-0930, 1130-1740
	AIR Suratgarh	Suratgarh, Rajasthan	DRM	Vividh Bharati, Mumbai
936	AIR Tiruchirapalli	Tiruchirapalli, Tamil Nadu	100	AIR South: 0015-0415(0530su), 0610-0915 (1130 su), 1200-1735
945	AIR Sambalpur	Sambalpur, Odisha	100	AIR East: 0000-0435, 0630-1000, 1130-1735
	AIR Tiruchirapalli	Tiruchirapalli, Tamil Nadu	DRM	Vividh Bharati, Chennai
954	AIR Najibabad	Najibabad, Uttar Pradesh	200	AIR North: 0630-0930, 1130-1740
963	AIR Jalgaon	Jalgaon, Maharashtra	20	AIR West: 0700-, 1200-, -1740
972	AIR Cuttack-A	Cuttack, Odisha	300	AIR East: 0023-0436(0500sa), 0658-1000, 1123-1735
981	AIR Raipur	Raipur, Chhattisgarh	100	AIR West: 0023-0930, 1128-1740
990	AIR Jammu	Jammu, Jammu and Kashmir	300	AIR North: 0025-0445, 0630-0930, 1130-1740
999	AIR Almora	Almora, Uttarakhand	1	AIR North: to be confirmed
	AIR Coimbatore	Coimbatore, Tamil Nadu	20	AIR South: 0020-0400, 0610(0630su)-0935(1100su), 1200-1735
	AIR Jammu	Jammu, Jammu and Kashmir	DRM	FM Rainbow, Delhi
1008	AIR Kolkata-B	Kolkata, West Bengal	100	AIR East: 0025-0445/0515v, 0700/0730-, 1130-1740

kHz	Station	Location	kW	Programme/Schedule (UTC)
1017	AIR Chennai-B	Chennai, Tamil Nadu	20	AIR South: 0030-0530, 0630-1200, 1230-1740
	AIR Kolkata-B	Kolkata, West Bengal	DRM	FM Rainbow, Delhi
1026	AIR Allahabad	Allahabad, Uttar Pradesh	20	AIR North: 0020-0435(1000su), 0625-1000, 1130-1742
1035	AIR Guwahati-B	Guwahati, Assam	20	AIR North-East: 0000-0345, 0600(0530su)-0930(0900su), 0945-1700
1044	AIR Mumbai-A	Mumbai, Maharashtra	100	Samvadita Channel: 0025-0440/0530, 0600/0630-0900, 1130-1741
	AIR Guwahati-B	Guwahati, Assam	DRM	FM Rainbow, Delhi
1053	AIR External Sce	Tuticorin, Tamil Nadu	200	0000-0045 in Tamil, 0045-0115 in Sinhala, 0115-0330 in Tamil, 1000-1100 in English, 1100-1300 in Tamil, 1300-1500 in Sinhala, 1500-1530 in Tamil, 1530-1600 in English
	AIR Leh	Leh, Jammu and Kashmir	20	AIR North: 0130-0630, 0700-0930, 1200-1700
	AIR Mumbai-A	Mumbai, Maharashtra	DRM	DTH Hindi
1062	AIR Pasighat	Pasighat, Arunachal Pradesh	10	AIR North-East: 1030-1630
1071	AIR External Sce	Rajkot, Gujarat	1000	0015-0100 in Urdu, 0100-0200 in Sindhi, 0200-0430 in Urdu, 0830-1230 in Urdu, 1230-1500 in Sindhi, 1500-1600 Baluchi, 1600-1930 Urdu
	AIR Pasighat	Pasighat, Arunachal Pradesh	DRM	Vividh Bharati, Mumbai
1080	AIR Rajkot	Rajkot, Gujarat	DRM	0015-0430 Prog 1 VB; Prog 2 Urdu 0100-0200 Prog 1 VB; Prog 2 Sindhi 0200-0430 Prog 1 VB; Prog 2 Urdu 0630-0815 Prog 1 VB; Prog 2 Urdu 0830-1230 Prog 1 VB; Prog 2 Urdu 1230-1500 Prog 1 VB; Prog 2 Sindhi 1500-1600 Prog 1 VB; Prog 2 Baluchi 1600-1930 Prog 1 VB; Prog 2 Urdu
1089	AIR Udupi	Udupi, Karnataka	20	AIR South: 0025-0500, 0700(0600su)-0935, 1200-1740
	AIR Naushera	Naushera, Jammu and Kashmir	20	AIR North: schedule to be confirmed
1107	AIR Gulbarga	Gulbarga, Karnataka	20	AIR South: -0400, 0700-0930, 1200-1738
1116	AIR Srinagar-A	Srinagar, Jammu and Kashmir	300	AIR North: schedule to be confirmed
1125	AIR Tezpur	Tezpur, Assam	20	AIR North-East: -1600
	AIR Udaipur	Udaipur, Rajasthan	20	AIR North: -1741
1143	AIR Ratnagiri	Ratnagiri, Maharashtra	20	AIR West: -1741
	AIR Rohtak	Rohtak, Haryana	20	AIR North: 0023-0435, 0630-0930, 1130-1740
1152	AIR Kavaratti	Kavaratti, Lakshadeep	10	AIR South: local prgrs 0050-0330; relays AIR Thiruvananthapuram
1161	AIR Thiru'puram-A	Thiruvananthapuram, Kerala	20	AIR South: 0020-0430(1740ss), 0630-1000, 1130-1740
1170	AIR Hyderabad	Hyderabad, Telengana	1	AIR South; stand-by for 738 kHz
1179	AIR Rewa	Rewa, Madhya Pradesh	20	AIR West: schedule to be confirmed
1188	AIR Mumbai	Mumbai, Maharashtra	50	Vividh Bharati: 0025-1200, 1245-1800
1197	AIR Shillong	Shillong, Meghalaya	1	AIR North-East: schedule to be confirmed
	AIR Tirunelveli	Tirunelveli, Tamil Nadu	20	AIR South: 0023-0430, 0610-1030, 1123-1735
1206	AIR Bhawanipatna	Bhawanipatna, Odisha	200	AIR East: 0025-0435, 0700-0945, 1130-1735
1215	AIR Delhi	Delhi, NCT	20	National Channel: 1325-0040
	AIR Puducherry	Puducherry, Puducherry	20	AIR South: 0015-0415(0430su), 0610-0930 (1030su), 1200-1735v
1224	AIR Srinagar-C	Srinagar, Jammu and Kashmir	10	Yuv Vani Channel: 0105-1205, 1245-1740
1233	AIR Tura	Tura, Meghalaya	20	AIR North-East: 0025-0335(0430su), 0630-1130, 1228-1545
1242	AIR Varanasi	Varanasi, Uttar Pradesh	100	AIR North: 0025-0435, 0630-0930, 1130-1740
1251	AIR Sangli	Sangli, Maharashtra	20	AIR West: 0020-0430, 0700-0930, 1200-1740
	AIR Varanasi-A	Varanasi, Uttar Pradesh	DRM	Vividh Bharati, Mumbai
1260	AIR Ambikapur	Ambikapur, Madhya Pradesh	20	AIR West: schedule to be confirmed
1269	AIR Agartala	Agartala, Tripura	20	AIR North-East: schedule to be confirmed
	AIR Madurai	Madurai, Tamil Nadu	20	AIR South: 0015-0345, 0610(0630su)-0900(1100su), 1200-1733
1287	AIR Panaji	Panaji, Goa	100	AIR West: 0630-, 1200-1742
1296	AIR Darbhanga	Darbhanga, Bihar	10	AIR East: schedule to be confirmed
	AIR Panaji	Panaji, Goa	DRM	FM Gold, Delhi

kHz	Station	Location	kW	Programme/Schedule (UTC)
1305	AIR Parbhani	Parbhani, Maharashtra	10	AIR West: 0020-0432, 0700-0830, 1200-1741
1314	AIR Bhuj	Bhuj, Gujarat	10	AIR West: schedule to be confirmed
1332	AIR Tezu	Tezu, Arunachal Pradesh	10	AIR North-East: schedule to be confirmed
1341	AIR Kohima	Kohima, Nagaland	1	AIR North-East: 0000-0510, 0700-0900, 1000-1600/1630/1700
1350	AIR Kupwara	Kupwara, Jammu and Kashmir	20	AIR North: 0025-0505, 0930-1630(1730sa); relays AIR Srinagar (R Kashmir)
1368	AIR Delhi	Delhi, NCT	20	0025-0530, 0630-1200, 1245-1740: Ch1 Vividh Bharati / Ch 2 FM Rainbow
1377	AIR Hyderabad-B	Hyderabad, Andhra Pradesh	20	AIR South: -0415, 0730/0800-0930, 1200-1735
1386	AIR Gwalior	Gwalior, Madhya Pradesh	20	AIR West: -0405, -0930, 1130-
1395	AIR Bikaner	Bikaner, Rajasthan	20	AIR North: schedule to be confirmed
1404	AIR Gangtok	Gangtok, Sikkim	20	AIR North-East: 0100-0400, 1030-1600
	AIR Bikaner	Bikaner, Rajasthan	DRM	Vividh Bharati, Mumbai
1413	AIR Kota	Kota, Rajasthan	20	AIR North: 0630-0930
1440	AIR Kurseong	Kurseong, West Bengal	1	AIR East: 0055-0430, 0620-1030, 1130-1700 (-1741sa/su)
1458	AIR Barmer	Barmer, Rajasthan	20	AIR North: schedule to be confirmed
	AIR Bhagalpur	Bhagalpur, Bihar	20	AIR East: 0020-0425(0435su), 0630-0955(1025su) 1130-1730
1467	AIR Jeypore	Jeypore, Odisha	100	AIR East: 0025-0440(0445su), 0700-1000, 1145-1741
	AIR Barmer	Barmer, Rajasthan	DRM	Vividh Bharati, Mumbai
1476	AIR Jaipur-A	Jaipur, Rajasthan	1	AIR West: 0025-0400(0600su), 0630-0931, 1130-1741
1485	AIR Ahwa	Ahwa, Gujarat	1	AIR West: 1200-1600
	AIR Chamoli-Gopes.	Chamoli, Uttarakhand	1	AIR North: schedule to be confirmed
	AIR Drass	Drass, Jammu and Kashmir	1	Vividh Bharati: 1030-1630
	AIR Dunagrpur	Dunagrpur, Rajasthan	1	AIR North: schedule to be confirmed
	AIR Khalsi	Khalsi, Jammu and Kashmir	1	AIR North: 1200-1700; relay AIR Leh
	AIR Joranda	Joranda, Odisha	1	AIR East: 0530-1740
	AIR Nongstoin	Nongstoin, Meghalaya	1	AIR North-East: 0925-1300
	AIR Nyoma	Nyoma, Jammu and Kashmir	1	Vividh Bharati: schedule to be confirmed
	AIR Soro	Soro, Odisha	1	AIR East: schedule to be confirmed
1512	AIR Kokrajhar	Kokrajhar, Assam	20	AIR North-East: 1230-1600
1521	AIR Tawang	Tawang, Arunachal Pradesh	20	AIR North-East: schedule to be confirmed
1530	AIR Agra	Agra, Uttar Pradesh	20	AIR North: -0400, 0700-, 1200-1740
	AIR Tawang	Tawang, Arunachal Pradesh	DRM	Vividh Bharati, Mumbai
1566	AIR Nagpur	Nagpur, Maharashtra	1000	National Channel: 1325-0040
1584	AIR Diphu	Diphu, Assam	1	AIR North-East: schedule to be confirmed
	AIR Himmat Nagar	Himmat Nagar, Gujarat	1	AIR West: schedule to be confirmed
	AIR Jamshedpur	Jamshedpur, Jharkhand	1	AIR East: 0025-0400(1200su), 0700-1000, 1130(1245su)-1740
	AIR Kalpa	Kalpa, Himachal Pradesh	1	AIR North: schedule to be confirmed
	AIR Kargil-B	Kargil, Jammu and Kashmir	1	AIR North: 1130-1630
	AIR Kavaratti	Kavaratti, Lakshadweep	1	AIR South: -1735; relays AIR Thiru'puram
	AIR Keonjhar	Keonjhar, Odisha	1	AIR East: 0025-0430, 0630-1130, 1200-1630
	AIR Kota	Kota, Rajasthan	1	AIR North: 0025-0400, 1130-1740
	AIR Mathura	Mathura, Uttar Pradesh	1	AIR North: 0025-0430, 0700-0930, 1200(1130su)-1740
	AIR Mon	Mon, Nagaland	1	AIR North-East: schedule to be confirmed
	AIR Padam	Padam, Jammu and Kashmir	1	Vividh Bharati: schedule to be confirmed
1593	AIR Bhopal-A	Bhopal, Madhya Pradesh	10	AIR West: 0025-0530, 0630-0930, 1130-1740
1602	AIR Diskit	Diskit, Jammu and Kashmir	1	Vividh Bharati: 1200-1700
	AIR Udthagamandalam	Udthagamandalam, Tamil Nadu	1	AIR South: 1130-, - 1700
	AIR Pauri	Pauri, Uttarakhand	1	AIR North: 1125-1600
	AIR Pithoragarh	Pithoragarh, Uttarakhand	1	AIR North: schedule to be confirmed
	AIR Saiha	Saiha, Mizoram	1	AIR North-East: 0930-1330
	AIR Tiesuru	Tiesuru, Jammu and Kashmir	1	Vividh Bharati: 1030-1630
	AIR Tuensang	Tuensang, Nagaland	1	AIR North-East: schedule to be confirmed
	AIR Uttarkashi	Uttarkashi, Uttarakhand	1	AIR North: schedule to be confirmed
	AIR Varanasi-B	Varanasi, Uttar Pradesh	1	Vividh Bharati: -0435, 0630-1200, 1245-1740
	AIR William Nagar	William Nagar, Meghalaya	1	AIR North-East: 0925-1330
	AIR Ziro	Ziro, Arunachal Pradesh	1	AIR North-East: schedule to be confirmed

All India Radio on Shortwave

All India Radio has national programmes, regional stations, and external services on shortwave.

All India Radio - National Channel

Transmitter Sites: Aligarh (alg) - 250 kW.

Schedule	Languages	kHz
1320-0043 (1850-0613 IST)	Hindi/English/Urdu	9380-alg

Note: Home News in Hindi and English at 1430, 1530, 1630, 1730, 1830, 1935, 2030, 2135, and 2230 UTC.

All India Radio - FM Gold

Transmitter Sites: Chennai (cni) - 100 kW.

Schedule	Languages	kHz
0130-0430 (0700-1000 IST)	Hindi/English	7270-cni

All India Radio - Vividh Bharati

Transmitter Sites: Aligarh (alg) - 250 kW; Bangalore (blg) - 500 kW

Morning schedule	Language	kHz
0025-0435 (0555-1005 IST)	Hindi	9865-bgl

Afternoon schedule	Language	kHz
0900-1200 (1430-1730 IST)	Hindi	6100-bgl 9380-alg 9865-bgl

Evening schedule	Language	kHz
1245-1740 (1815-2310 IST)	Hindi	9865-bgl

All India Radio - Uttarakhand Programme

Transmitter Site: Delhi (Kingsway) - 100 kW.

Morning schedule	Language	kHz
0200-0230 (0730-0800 IST)	Hindi	6030-dki

Evening schedule	Language	kHz
1215-1430 (1745-2000 IST)	Hindi	6030-dki

All India Radio Regional Shortwave Stations currently on air

kHz	kW	Location	Times/UTC	Region	Transmitter use at other times
4760	10	Leh, Jammu and Kashmir	0213-0400mo-sa	North	on 6000 afternoons
			0130-0430su	North	on 6000 afternoons
			1130-1630	North	on 6000 afternoons
4760	4	Port Blair, Andaman Islands	2355-0300	South	on 7390 afternoons
			1030-1700mo-fr	South	on 7390 afternoons
			1030-1730sa/su	South	on 7390 afternoons
4800	50	Hyderabad, Telengana	0020-0215	South	on 7420 afternoons
			1130-1744	South	on 7420 afternoons
4810	50	Bhopal, Madhya Pradesh	0025-0215	West	on 7430 afternoons
			1130-1742	West	on 7430 afternoons
4835	10	Gangtok, Sikkim	0100-0500	North-East	on 6085 afternoons
			1030-1600	North-East	on 6085 afternoons
4870	50	Delhi (Kingsway), NCT	0230-0330	North	
			1430-1530	North	
4895	50	Kurseong, West Bengal	0055-0430	East	on 7230 afternoons
			1130-1700mo-fr	East	on 7230 afternoons
			1130-1741sa/su	East	on 7230 afternoons
4910	50	Jaipur, Rajasthan	0025-0430mo-fr	North	on 7325 afternoons
			0025-0530su	North	on 7325 afternoons
			1130-1741	North	on 7325 afternoons
4920	50	Chennai, Tamil Nadu	0015-0245	South	on 7380 afternoons
			1200-1739	South	on 7380 afternoons
4970	50	Shillong, Meghalaya	0025-0400	North-East	on 7315 afternoons
			1056-1740	North-East	on 7315 afternoons
5040	50	Jeypore, Odisha	0025-0445	East	on 6040 afternoons
			1130-1741	East	on 6040 afternoons
6000	10	Leh, Jammu and Kashmir	0700-0930mo-sa	North	on 4660 mornings/evenings
			0630-0930su	North	on 4660 mornings/evenings
6100	250	Delhi, NCT	0730-0830	North	
7230	50	Kurseong, West Bengal	0620-1030	East	on 4895 mornings/evenings
7315	50	Shillong, Meghalaya	0656-0931	North-East	on 4970 mornings/evenings
7325	50	Jaipur, Rajasthan	0630-0931	North	on 4910 mornings/evenings
7380	50	Chennai, Tamil Nadu	0300-0930mo-sa	South	on 4920 mornings/evenings
			0300-1130su	South	on 4920 mornings/evenings

kHz	kW	Location	Times/UTC	Region	Transmitter use at other
7390	4	Port Blair, Andaman Islands	0315-0400mo-fr 0315-0500sa/su 0700-0931mo-sa 0700-1000su	South South South South	on 4760 mornings/evenings on 4760 mornings/evenings on 4760 mornings/evenings on 4760 mornings/evenings
7420	50	Hyderabad, Telengana	0225-0930mo-sa 0225-1030su	South South	on 4800 mornings/evenings on 4800 mornings/evenings
7430	50	Bhopal, Madhya Pradesh	0225-0932	West	on 4810 mornings/evenings

The following regional shortwave stations of All India Radio have been discontinued since 2014:

Gorakhpur	3945, 7250	Mumbai	4840, 7240	Lucknow	4880, 7440
Imphal	4775, 7335	Kohima	4850, 6065	Guwahati	4940, 7280, 7420
Kolkata	4820, 7210	Ranchi	4960, 5985	Itanagar	4990, 6150
Jammu	4830, 5965	Shimla	4860, 6020	(Jose Jacob DX-India)	

All India Radio Home News on Shortwave

Although the extensive schedule of Home News broadcasts direct from shortwave transmitters in Delhi was discontinued a few years ago, the following are still aired on shortwave for listeners in South Asia:

Times	Language	Freq/kHz
0230-0245 (0800-0900 IST)	Hindi	7505 - Delhi Kingsway (100 kW)
0245-0300 (0800-0900 IST)	English	7505 - Delhi Kingsway (100 kW)
1130-1135 (1700-1705 IST)	Hindi	9950 - Delhi Kingsway (100 kW) & 11620 - Delhi Khampur (250 kW)
1135-1140 (1705-1710 IST)	English	9950 - Delhi Kingsway (100 kW) & 11620 - Delhi Khampur (250 kW)

All India Radio - General Overseas Service

AIR's General Overseas Service broadcasts in English and is aimed at a general international audience.

Transmitter Sites: Delhi-Khampur (dkh); Aligarh (alg); Bangalore (blg); Chinsurah (chi) Chennai (cni); Mumbai (mum); Panaji (pan); **frequencies in blue are DRM**

Time/UTC	Language	Target	KHz
1000-1100	English	Australia/New Zealand North-East Asia South Asia	13695-bgl 17895-bgl 13605-bgl 15030-alg 15410-bgl 594-chi 7270-cni
1330-1500	English	South-East Asia	9690-bgl 13710-bgl
1745-1945	English	East Africa UK/Western Europe West & North-West Africa	11935-mum 13695-bgl 17670-bgl 7550bgl 9950-dkh 11670 -bgl 9445-dkh
2045-2230	English	Australia/New Zealand UK/Western Europe	9910-bgl 11620-bgl 11740-pan 7550-bgl 9445-bgl 9950-dkh
2245-0045	English	East & South-East Asia North-East Asia	6045-dkh 9690-bgl 9705-pan 9445-bgl 11645-dkh

A detailed programme schedule for All India Radio's General Overseas Service in English is updated daily and available at: <http://airworldservice.org/cuesheet/cuesheet.pdf> (Jose Jacob, DX-India)

All India Radio - External Services

The External Services Division of All India Radio broadcasts in 27 languages to countries outside of India, primarily on shortwave although mediumwave is also used to reach neighbouring countries.

Transmitter Sites: Delhi-Khampur (dkh); Delhi-Kingsway (dki); Aligarh (alg); Bangalore (blg); Chennai (cni); Chinsurah (chi); Jalandhar (jal); Mumbai (mum); Panaji (pan); Rajkot (raj); **frequencies in blue are DRM**

Time/UTC	Language	Target	KHz
0000-0045	Tamil	South/South-East Asia	1053-tut 7270-cni 9835-dki 11740-pan 13795-bgl
0015-0100	Urdu	West Asia	1071-raj
0015-0430	Urdu	West Asia	702-jal 7340-mum 7520-dkh
0030-0230	Bangla	South Asia	594-chi
0045-0115	Sinhala	South Asia	1053-tut 7270-cni 11740-pan
0100-0200	Sindhi	West Asia	1071-raj 7380-dki
0115-0330	Tamil	South Asia	1053-tut
0130-0230	Nepali	South Asia	603-chi 7505-dki 9800-bgl
0200-1230	Urdu	West Asia	1071-raj
0215-0300	Kannada	Middle East	13695-bgl 15120-bgl
0215-0300	Pashto	West Asia	9910-dkh 11560-pan 11670-bgl
0300-0345	Dari	West Asia	9910-dkh 11560-pan 11670-bgl
0300-0830	Bangla	South Asia	594-chi
0315-0415	Hindi	Middle East/East Africa	13695-bgl 15120-bgl 15185-bgl 17715-bgl
0400-0430	Persian	Middle East	11670-bgl 15210-pan

Time/UTC	Language	Target	KHz
0415-0430	Gujarati	East Africa	15120-bgl 15185-bgl 17715-bgl
0430-0530	Hindi	East Africa	15120-bgl 15185-bgl 17715-bgl
0430-0530	Arabic	Middle East	11670-bgl 15210-pan
0530-0600	Urdu	Middle East	11670-bgl 15210-pan (Haj Season)
0630-0815	Urdu	West Asia	1071-raj
0700-0800	Nepali	South Asia	603-chi 7520-dkh 9940-dki 11850-dki
0800-0830	Punjabi	West Asia	702-jal
0830-1130	Urdu	South Asia	702-jal 7250-dki 7340-mum 7520-dkh 9950-dki 11620-dkh
0845-0900	Hindi	South Asia	594-chi
0845-0945	Indonesian	South-East Asia	15770-pan 17510-bgl 17870-bgl
10000-1515	Bangla	South Asia	594-chi
1100-1300	Tamil	South Asia	1053-tut
1115-1200	Thai	South-East Asia	11670-bgl 13645-alg 15410-pan
1115-1215	Tamil	South/South-East Asia	603-chi 7270-cni 13695-bgl
1130-1230	Punjabi	West Asia	702-jal
1145-1315	Chinese	East Asia	15040-bgl 17705-bgl
1215-1245	Telegu	South Asia	13695-bgl
1215-1315	Burmese	South-East Asia	603-chi 9950-bgl
1215-1330	Tibetan	East Asia	7555-dki 9575-bgl 11775-pan
1230-1300	Saraiki	West Asia	702-jal
1230-1500	Sindhi	West Asia	1071-raj 7340-mum 9620-alg
1300-1430	Punjabi	West Asia	702-jal
1300-1500	Sinhala	South Asia	1053-tut 7270-cni 9820-dkh
1315-1415	Dari	West Asia	11560-bgl
1330-1430	Nepali	South Asia	603-chi 4870-dki 7555-dki 11775-pan
1415-1530	Pashto	West Asia	11560-bgl
1430-1930	Urdu	West Asia	702-jal
1500-1530	Tamil	South Asia	1053-tut
1500-1600	Baluchi	South Asia	1071-raj 6165-bgl 7340-mum 9620-alg
1515-1600	Gujarati	South Asia	11620-bgl 13640-bgl 15175-pan
1515-1615	Swahili	East Africa	9950-bgl 13605-bgl
1600-1730	Bangla	South Asia	594-chi
1600-1930	Urdu	West Asia	1071-raj
1615-1715	Russian	Russia	9595-bgl 15140-bgl
1615-1730	Hindi	Middle East/East Africa	7505-pan 9950-bgl 12025-pan 13605-bgl
1615-1730	Persian	Middle East	9620-alg 11710-dkh 13640-bgl
1730-1830	Malayalam	Middle East	7505-pan 12025-pan
1730-1945	Arabic	Middle East	9620-alg 11710-dkh 13640-bgl
1945-2030	French	West & North-West Africa	7550-bgl 9620-alg 11710-dkh 13640-bgl 17670-bgl
1945-2045	Hindi	UK/Western Europe	7550-bgl 9445-bgl 9950-dkh
2300-0000	Hindi	East & South-East Asia	9910-bgl 11740-pan 13795-bgl

All India Radio - DRM transmissions on shortwave

Transmitter Sites: Bangalore - 185 kW.

Times/UTC	Freq/kHz	Channel 1	Channel 2	Target
1745-1945	7550-bgl	English	Raagam	Europe
1945-2030	7550-bgl		French	Europe
1945-2045	7550-bgl	Hindi	Raagam	Europe
2045-2230	7550-bgl	English	Raagam	Europe

Target Broadcasts from India to Pakistan-Administered Azad Kashmir

Voice of Kashmir (Radio Sedayee Kashmir)

The Voice of Kashmir is a radio station operated by the Indian government with anti-Pakistani programming aimed at Kashmir. It first went on air in late 2002 via the shortwave transmitters of All India Radio in Delhi.

Transmitter Sites: Delhi-Khampur (dkh); Delhi-Kingsway (dki)

Schedule	Languages	Target	kHz
0230-0330 (0730-0830 PKT)	Kashmiri/Dogri	Kashmir	4870-dkh
0730-0830 (1230-1330 PKT)	Kashmiri/Dogri	Kashmir	6100-dki
1430-1530 (1930-2030 PKT)	Kashmiri/Dogri	Kashmir	4870-dkh

Maldives

Maldives Broadcasting Corporation is the public broadcasting service of the Maldives. It is aired on mediumwave and FM. Shortwave transmissions to Maldavian communities in South Asia were discontinued several years ago when TV Maldives appeared on satellite.

Mediumwave stations

kHz	Station	Location	kW	Schedule (UTC)
1449	Dhivehi Raajjeyge Adu (Voice of the Maldives)	Malé	10	24h in Dhivehi, except 1300-1315 in English

Nepal

Radio Nepal

Radio Nepal was established on 1 April 1951. Radio Nepal currently airs programmes on mediumwave and FM. The shortwave transmitter at Khumaltar has not been reported on its usual frequency of 5005 kHz since mid-2010. Programming is mainly in Nepali but the daily schedule includes segments in other languages.

Radio Nepal on mediumwave

kHz	Location	kW	Schedule (UTC)
576	Surkhet, Mid-Western Region	100	2315-1600 in Nepali, except for news in other languages as follows: 0010-0015 Sanskrit, 0215-0227 English, 0325-0330mo/we Newari, 0330-0337fr-su Newari, 0417-0515mo Sherpa, 0417-0515tu Bhojpuri, 0417-0515we Newari, 0417-0515su Mathili, 0815-0827 English, 1415-1427 English; between 1600-1730 on 576 kHz only BBC WS is relayed follows: 1600-1630 in Nepali and 1630-1730 in English; following the BBC relay, Radio Nepal continues at 1730-1742 with news in Hindi (repeat of 1615 news) and 1742-1747 news in Nepali (repeat of 1715 news)
648	Dhankuta, Eastern Region	100	2315-1715 in Nepali, except for news in other languages as follows: 0010-0015 Sanskrit, 0215-0227 English, 0325-0330mo/we Newari, 0330-0337fr-su Newari, 0417-0515mo Sherpa, 0417-0515tu Bhojpuri, 0417-0515we Newari, 0417-0515su Mathili, 0815-0827 English, 1415-1427 English, 1615-1627 Hindi
684	Pokhara, Western Region	100	2315-1715 in Nepali, except for news in other languages as follows: 0010-0015 Sanskrit, 0215-0227 English, 0325-0330mo/we Newari, 0330-0337fr-su Newari, 0417-0515mo Sherpa, 0417-0515tu Bhojpuri, 0417-0515we Newari, 0417-0515su Mathili, 0815-0827 English, 1415-1427 English, 1615-1627 Hindi
792	Kathmandu, Central Region	100	2315-1715 in Nepali, except for news in other languages as follows: 0010-0015 Sanskrit, 0215-0227 English, 0325-0330mo/we Newari, 0330-0337fr-su Newari, 0417-0515mo Sherpa, 0417-0515tu Bhojpuri, 0417-0515we Newari, 0417-0515su Mathili, 0815-0827 English, 1415-1427 English, 1615-1627 Hindi
810	Dipayal, Far Western Region	10	2315-1715 in Nepali, except for news in other languages as follows: 0010-0015 Sanskrit, 0215-0227 English, 0325-0330mo/we Newari, 0330-0337fr-su Newari, 0417-0515mo Sherpa, 0417-0515tu Bhojpuri, 0417-0515we Newari, 0417-0515su Mathili, 0815-0827 English, 1415-1427 English, 1615-1627 Hindi
1143	Bardibas, Central Region	10	2315-1715 in Nepali, except for news in other languages as follows: 0010-0015 Sanskrit, 0215-0227 English, 0325-0330mo/we Newari, 0330-0337fr-su Newari, 0417-0515mo Sherpa, 0417-0515tu Bhojpuri, 0417-0515we Newari, 0417-0515su Mathili, 0815-0827 English, 1415-1427 English, 1615-1627 Hindi

Pakistan

Pakistan Broadcasting Corporation

Pakistan Broadcasting Corporation, also known as Radio Pakistan, is a public radio broadcasting network, as well as a mass-media state-owned megacorporation in Pakistan.

PBC's radio services and television programmes are broadcast through satellite, cable, FM, AM, and shortwave radio frequencies. At national level, PBC broadcast its programmes in 23 different state-recognised languages.

Radio Pakistan on mediumwave

kHz	Location	kW	Schedule (UTC)
540	Peshawar, Khyber-Pakhtunkhwa	300	0045-0405, 0600-1810 in Urdu, with news in English at 0300, 0800, 1100, 1300, 1600 and 1700
567	Khuzdar, Baluchistan	300	1155-1810 in Urdu, with news in English at 1300, 1600 and 1700
585	Islamabad, Capital Territory	500	0045-0700, 0800-1900 in Urdu, with news in English at 0300, 0800, 1100, 1300, 1600 and 1700; includes Voice of Qur'an at 0200-0700
630	Lahore, Punjab	100	0200-1900 in Urdu, with news in English at 0300, 0800, 1100, 1300, 1600 and 1700; includes Voice of Qur'an at 0200-0700
639	Karachi, Sindh	100	NCAC: 0200-1900 in Urdu, with news in English at 0300, 0800, 1100, 1300, 1600 and 1700
711	DI Khan, Khyber-Pakhtunkhwa	100	0200-1900 in Urdu, with news in English at 0300, 0800, 1100, 1300, 1600 and 1700
756	Yaru, Quetta, Baluchistan	100	0045-0805 and 1000-1810 in Urdu, with news in English at 0300, 1100, 1300, 1600 and 1700; includes Voice of Qur'an at 0200-0700
828	Karachi, Sindh	100	0045-0405, 0600-1900 in Urdu; with news in English at 0300, 0800, 1100, 1300, 1600 and 1700
981	Turbat, Baluchistan	100	new transmitter in 2012 but current status subject to confirmation
1008	Hyderabad, Sindh	120	0045-0405, 0600-1900 in Urdu, with news in English at 0300, 0800, 1100, 1300, 1600 and 1700
1035	Multan, Punjab	100	0045-0430 and 0600-1800 in Urdu, with news in English at 0300, 0800, 1100, 1300, 1600 and 1700
1134	Quetta, Baluchistan	100	NCAC: 0200-1900 in Urdu, with news in English at 0300, 0800, 1100, 1300, 1600 and 1700
1152	Rawalpindi, Punjab	100	NCAC: 0200-1900 in Urdu, with news in English at 0300, 0800, 1100, 1300, 1600 and 1700
1170	Peshawar, Khyber-Pakhtunkhwa	100	NCAC: 0200-1900 in Urdu, with news in English at 0300, 0800, 1100, 1300, 1600 and 1700
1251	Loralai, Baluchistan	10	1145-1615 in Urdu, with news in English at 1300 and 1600
1260	Peshawar, Khyber-Pakhtunkhwa	400	hours of operation to be confirmed
1332	Lahore, Punjab	100	NCAC: 0200-1900 in Urdu, with news in English at 0300, 0800, 1100, 1300, 1600 and 1700
1341	Bahawalpur, Punjab	10	0850-1810 in Urdu, with news in English 0300, 0800, 1100, 1300, 1600 and 1700
1449	Zhob, Baluchistan	10	1155-1600 in Urdu, with news in English at 1300
1476	Faisalabad, Punjab	10	0045-0820 in Urdu, with news in English at 0300 and 0800
1512	Gilgit, Northern Areas	10	1000-1700 in Urdu, with news in English at 1100, 1300 and 1600
1557	Skardu, Northern Areas	10	1000-1700 in Urdu, with news in English at 1100, 1300 and 1600
1584	Chitral, Khyber-Pakhtunkhwa	0.25	1050-1515 in Urdu, with news in English at 1100 and 1300
1584	Sibi, Baluchistan	0.25	0755-1108 in Urdu, with news in English at 0800 and 1100

Radio Pakistan - External Services

Radio Pakistan shortwave transmissions are currently suspended pending the refurbishment of facilities.

Azad Kashmir**Azad Kashmir Radio on mediumwave**

kHz	Station	Location	kW	Schedule (UTC)
792	Azad Kashmir Radio, Muzaffarabad Channel	Muzaffarabad	150	transmitter is currently off-air
936	Azad Kashmir Radio, Mirpur Channel	Mirpur	100	0045-0515, 1100-1810 in Gojri, Kashmiri, Pahari, Urdu, also includes relays from NCAC; news in English at 0300, 1100, 1300, 1600 and 1700
7265	Azad Kashmir Radio Trarkhel	Islamabad	100	1100-1300 & 1600-1810 in Urdu, Rawalpindi III Programme (includes content from Radio Pakistan);

Target Broadcasts from Pakistan to Indian State of Jammu And Kashmir**Voice of Jammu and Kashmir Freedom Movement**

The Voice of Jammu and Kashmir Freedom Movement is the mouthpiece of the Jammu and Kashmir Freedom Movement (JKFM) and programmes have been aired on shortwave since 1999.

Transmitter Site: Rawat, Islamabad - 100 kW.

Times/UTC	Languages	kHz
1300v-1445v (1830-2015 IST)	Kashmiri/Urdu/Balti/Gojri/English/Hindi	7230 - to be confirmed

Sri Lanka

Sri Lanka Broadcasting Corporation

Sri Lanka Broadcasting Corporation is the public broadcasting service of Sri Lanka. All domestic services are now on FM, although mediumwave and shortwave is used for SLBC external services.

Sri Lanka Broadcasting Corporation - External Services

Transmitter Site: MW: Puttalam - 50 kW; SW: Trincomalee - 125 kW

Time/UTC	Days	Languages	Target	kHz	
0115-0130	Daily	Bengali	South Asia	11905	sponsored Christian prgrs
0130-0230	Daily	Hindi	South Asia	11905	Oldies music; also includes sponsored Christian prgrs in English
0715-0815	Sun	Tamil	South Asia	1125	
1115-1130	Daily	Hindi	South Asia	9720	
1130-1145	Daily	Malayalam	South Asia	9720	
1145-1200	Daily	Hindi	South Asia	9720	
1200-1215	Daily	Tamil	South Asia	9720	
1630-1830	Daily	Sinhala	Middle East	11750	broadcast for workers in the Middle East

Stations currently broadcasting on mediumwave

kHz	Location	kW	Schedule
873	Puttalam, North Western Province	400	FEBA India: 0130-0230su in Tamil
882	Puttalam, North Western Province	400	TWR Radio 882: 2230-0130 (morning) and 1200-1730 (evening)
1125	Puttalam, North Western Province	50	FEBA India: 0000-0100su-tu, 0100-0115tu & 0130-0230su in Tamil, 1330-1345tu/we in Telugu; SLBC: 0715-0815su in Tamil
1548	Trincomalee	400	Athmik Yatra R: 2345-0045 (morning) and 1330-1530 (evening)

Full schedules of FEBA India, TWR India/Radio 882, and Athmik Yatra Radio can be found on pages 16-20.

SLBC Shortwave Relay Station - Trincomalee

The Deutsche Welle Relay Station at Trincomalee was opened in 1984 and closed on 1 November 2011. Upon closure it was transferred to the Sri Lanka Broadcasting Corporation, who now hire the transmitters to other broadcasting organisations.

Transmitter Site: Trincomalee - 125/250 kW.

Times/UTC	Days	Station	Language	Target	kHz
0000-0030	Daily	Adventist World R	Burmese	South-East Asia	9810
0000-0030	Daily	Adventist World R	Thai	South-East Asia	11730
0030-0100	Daily	Adventist World R	Karen	South-East Asia	9810
0100-0130	Sun-Thu	Adventist World R	Amoy	East Asia	15625
0100-0200	Fri/Sat	Adventist World R	Chinese	East Asia	15625
0130-0200	Sun-Thu	Adventist World R	Cantonese	East Asia	15625
0300-0330	Daily	Adventist World R	Oromo	Horn of Africa	15500
0300-0400	Daily	Deutsche Welle	Swahili	East Africa	15400
0330-0400	Daily	Adventist World R	Amharic	Horn of Africa	15500
0500-0600	Daily	Deutsche Welle	English	East Africa	17800
1130-1200	Daily	Adventist World R	Shan	South-East Asia	15610
1200-1230	Daily	Adventist World R	Mon	South-East Asia	15400
1230-1300	Wed/Fri/Sun	Adventist World R	Meitei	South Asia	15430
1230-1300	Mon/Tue/Thu/Sat	Adventist World R	Bengali	South Asia	15430
1300-1330	Daily	Adventist World R	Cambodian	South-East Asia	15150
1300-1330	Daily	Adventist World R	Bengali	South Asia	15255
1300-1330	Sun-Wed/Fri	Adventist World R	Isan	South-East Asia	17770
1300-1330	Thu/Sat	Adventist World R	Laotian	South-East Asia	17770
1330-1400	Sun	Adventist World R	Cambodian	South-East Asia	15150
1330-1400	Daily	Adventist World R	Kok Borok	South Asia	15255
1330-1400	Daily	Deutsche Welle	Dari	Afghanistan	17720
1400-1430	Daily	Deutsche Welle	Pashto	Afghanistan	17720
1400-1415	Mon/Fri/Sun	FEBA R	Kannada	South Asia	9775
1400-1415	Tue/Wed	FEBA R	Telugu	South Asia	9775
1400-1415	Thu	FEBA R	Malayalam	South Asia	9775
1400-1415	Sat	FEBA R	Tamil	South Asia	9775
1415-1430	Mon	FEBA R	English	South Asia	9775
1415-1430	Tue	FEBA R	Kuvi	South Asia	9775
1415-1430	Wed/Fri/Sat	FEBA R	Malayalam	South Asia	9775
1500-1530	Daily	Adventist World R	Nepali	South Asia	15745
1500-1600	Daily	Deutsche Welle	Swahili	East Africa	15275 17800

Times/UTC	Days	Station	Language	Target	kHz
1530-1600	Daily	Adventist World R	Hindi	South Asia	11955
1530-1600	Daily	Adventist World R	Marathi	South Asia	12035
1600-1630	Daily	Adventist World R	English	South Asia	11955
1600-1630	Daily	Adventist World R	Urdu	South Asia	15360
1600-1700	Daily	Deutsche Welle	Amharic	Horn of Africa	15275
1630-1700	Tue/Thu/Sat/Sun	Adventist World R	Sindhi	South Asia	15360
1630-1700	Mon/Wed/Fri	Adventist World R	English	South Asia	15360
1830-1900	Daily	Adventist World R	English	Africa	15155
2200-2300	Daily	Adventist World R	Vietnamese	South-East Asia	7375

Selected shortwave target broadcasts to South Asia

FEBA India

FEBA India is a non-denominational Gospel radio station broadcasting to South Asia.

Transmitter Sites: MW: Puttlam, Sri Lanka - 50 kW; SW: Dhabbaya, UAE - 250 kW; Tashkent, Uzbekistan - 100 kW; Trincomalee, Sri Lanka - 125 kW.

Times/UTC	Days	Language	Target	kHz
0000-0030	Sun-Tue	Tamil	South Asia	1125-put
0030-0045	Mon	Tamil	South Asia	1125-put
0030-0100	Sun	Tamil	South Asia	1125-put
0045-0100	Mon/Tue	Tamil	South Asia	1125-put
0100-0115	Tue	Tamil	South Asia	1125-put
0130-0230	Sun	Tamil	South Asia	1125-put
0200-0215	Daily	Urdu	South Asia	7320-dha
0215-0230	Mon-Wed	Baluchi	South Asia	7320-dha
0215-0230	Sun	Urdu	South Asia	7320-dha
0215-0230	Thu-Sat	Sindhi	South Asia	7320-dha
1200-1230	Daily	Tibetan	South Asia	15215-dha
1330-1345	Sat	Tamil	South Asia	1125-trm
1330-1345	Tue/Wed	Telugu	South Asia	1125-trm
1400-1415	Mon/Fri/Sun	Kannada	South Asia	9775-trm
1400-1415	Tue/Wed	Telugu	South Asia	9775-trm
1400-1415	Thu	Malayalam	South Asia	9775-trm
1400-1415	Sat	Tamil	South Asia	9775-trm
1415-1430	Mon	English	South Asia	9775-trm
1415-1430	Tue	Kuvi	South Asia	9775-trm
1415-1430	Wed/Fri/Sat	Malayalam	South Asia	9775-trm
1430-1500	Daily	Hindi	South Asia	9540-tas

TWR India

TWR India is a Christian radio station established in 1977 broadcasting to South Asia.

Transmitter Sites: MW: Puttlam, Sri Lanka - 400 kW; SW: Tashkent, Uzbekistan - 100 kW; Yerevan, Armenia - 300 kW.

Times/UTC	Days	Language	Target	kHz
2230-2300	Daily	Bengali	South Asia	882-put
2300-2315	Mon/Tue	Kukna	South Asia	882-put
2300-2330	Wed-Sun	Gujarati	South Asia	882-put
2315-2330	Mon	Kotuwalla	South Asia	882-put
2315-2330	Tue	Kutchi	South Asia	882-put
2330-0000	Daily	Malayalam	South Asia	882-put
0000-0030	Daily	Tamil	South Asia	882-put
0030-0045	Tue-Thu	Tamil	South Asia	882-put
0030-0045	Fri-Mon	English	South Asia	882-put
0030-0045	Mon-Fri	Bengali	South Asia	7280-tas
0045-0100	Mon-Fri	Tamil	South Asia	882-put
0045-0100	Sat	Konkani	South Asia	882-put
0045-0100	Sun	Tulu	South Asia	882-put
0045-0115	Mon-Fri	Bhojpuri	South Asia	7280-tas
0100-0115	Wed	Oriya	South Asia	882-put
0100-0115	Thu	Telugu	South Asia	882-put
0100-0115	Fri/Sat	Kannada	South Asia	882-put
0100-0115	Sun	Hindi	South Asia	7280-tas
0100-0130	Mon/Tue	Tamil	South Asia	882-put
0100-0130	Sun	Malayalam	South Asia	882-put

Times/UTC	Days	Language	Target	kHz
0115-0130	Wed/Thu	English	South Asia	882-put
0115-0130	Fri	Malvi	South Asia	882-put
0115-0130	Sat	Kannada	South Asia	882-put
0115-0130	Sun-Wed	Dzonka	South Asia	7280-tas
0115-0130	Thu	Nepali	South Asia	7280-tas
1200-1215	Daily	English	South Asia	882-put
1215-1230	Mon	Koya	South Asia	882-put
1215-1230	Tue	Banjara	South Asia	882-put
1215-1230	Wed	Konkani	South Asia	882-put
1215-1230	Thu	Deccani	South Asia	882-put
1215-1230	Sat	Gondi	South Asia	882-put
1230-1245	Mon	Chhattisgarhi	South Asia	882-put
1230-1245	Tue	Varli	South Asia	882-put
1230-1245	Wed/Thu	Gujarati	South Asia	882-put
1230-1245	Sat	English	South Asia	882-put
1230-1245	Sun	Malayalam	South Asia	882-put
1245-1300	Sat/Sun	Soura	South Asia	882-put
1245-1300	Sat	Kui	South Asia	9345-yer
1245-1300	Sun	Santhali	South Asia	9345-yer
1245-1315	Mon-Fri	Chhattisgarhi	South Asia	882-put
1300-1315	Sat/Sun	Chhattisgarhi	South Asia	882-put
1300-1315	Sat	Ho	South Asia	9345-yer
1300-1315	Sun	Kumaoni	South Asia	9345-yer
1315-1330	Sun-Tue	Marwari	South Asia	9345-yer
1315-1330	Wed/Thu	Mewadi	South Asia	9345-yer
1315-1330	Fri	Braj Bhasha	South Asia	9345-yer
1315-1330	Sat	Bengali	South Asia	9345-yer
1315-1345	Mon-Fri	Deccani	South Asia	882-put
1315-1345	Sat	Gujarati	South Asia	882-put
1315-1345	Sun	Telugu	South Asia	882-put
1330-1345	Mon/Tue	Mairhili	South Asia	9345-yer
1330-1345	Wed	Kashmiri	South Asia	9345-yer
1330-1345	Thu	Tibetan	South Asia	9345-yer
1330-1345	Fri	Haryanvi	South Asia	9345-yer
1330-1345	Sat	Garhwali	South Asia	9345-yer
1330-1345	Sun	Bondo	South Asia	9345-yer
1345-1400	Sat	Telugu	South Asia	882-put
1345-1400	Mon-Sat	Hindi	South Asia	7505-tas
1345-1400	Sun	Kuruk	South Asia	9920-yer
1345-1415	Mon-Fri	Telugu	South Asia	882-put
1345-1415	Sun	Gujarati	South Asia	882-put
1345-1415	Mon-Fri	Maithili	South Asia	9920-yer
1345-1415	Sat	Bundeli	South Asia	9920-yer
1400-1415	Sat	Gujarati	South Asia	882-put
1400-1415	Thu-Tue	Hindi	South Asia	7505-tas
1400-1415	Wed	Awadhi	South Asia	7505-tas
1400-1415	Sun	Kharia	South Asia	9920-yer
1415-1430	Sat	Oriya	South Asia	882-put
1415-1430	Sun/Mon	Magahi	South Asia	9920-yer
1415-1430	Tue/Wed	Mundari	South Asia	9920-yer
1415-1430	Thu-Sat	Kuruk	South Asia	9920-yer
1415-1445	Sun-Fri	Kannada	South Asia	882-put
1415-1445	Daily	Hindi	South Asia	7505-tas
1430-1445	Sat/Sun	Sadri	South Asia	9920-yer
1430-1500	Sat	Marathi	South Asia	882-put
1430-1500	Daily	Urdu	South Asia	1467-bis
1430-1500	Mon-Fri	Sindhi	South Asia	9920-yer
1445-1500	Sat/Sun	Chodri	South Asia	9920-yer
1445-1515	Mon-Fri	Marathi	South Asia	882-put
1445-1515	Mon-Sat	Hindi	South Asia	7505-tas
1445-1515	Sun	Punjabi	South Asia	7505-tas
1500-1515	Mon	Gamit	South Asia	9575-yer
1500-1515	Tue/Wed	Bhili	South Asia	9575-yer
1500-1515	Thu/Fri	Vasavi	South Asia	9575-yer

Times/UTC	Days	Language	Target	kHz
1500-1530	Sat	Oriya	South Asia	882-put
1500-1530	Sat/Sun	Gamit	South Asia	9575-yer
1500-1545	Sun	Oriya	South Asia	882-put
1515-1530	Mon/Tue	Mawchi	South Asia	9575-yer
1515-1530	Wed/Thu	Dhodiya	South Asia	9575-yer
1515-1530	Fri	Gamit	South Asia	9575-yer
1515-1545	Mon-Fri	Oriya	South Asia	882-put
1515-1545	Daily	Punjabi	South Asia	7505-tas
1530-1545	Sat	Telugu	South Asia	882-put
1530-1600	Sat/Sun	Urdu	South Asia	9575-yer
1545-1615	Mon-Fri	Gondi	South Asia	882-put
1545-1615	Sat/Sun	English	South Asia	882-put
1545-1615	Mon-Fri	Punjabi	South Asia	7505-tas



Athmeeya Yathra Radio

Athmeeya Yathra (Spiritual Journey) is a Kerala-based Christian radio broadcast that began in India in 1985.

Transmitter site: MW: Trinmalee, Sri Lanka - 400 kW; SW: Nauen, Germany - 100 kW.

Times/UTC	Days	Language	Target	kHz
2330-2345	Mon	Lungeli-Magar	South Asia	9520-nau
2330-2345	Tue/Wed	Gurung	South Asia	9520-nau
2330-2345	Thu	Sherpa	South Asia	9520-nau
2330-2345	Fri/Sat	Limbu	South Asia	9520-nau
2330-2345	Sun	Bantawa	South Asia	9520-nau
2345-0000	Tue-Sat	Tamil	South Asia	1548-trm
2345-0000	Sun/Mon	Sinhala	South Asia	1548-trm
2345-0000	Tue-Thu	Burmese	South Asia	9520-nau
2345-0000	Fri/Sat	Karbi	South Asia	9520-nau
2345-0000	Sun/Mon	Chin	South Asia	9520-nau
0000-0015	Fri-Sun	Mising	South Asia	9520-nau
0000-0015	Mon	Tulu	South Asia	1548-trm
0000-0015	Mon/Tue	Bodo	South Asia	9520-nau
0000-0015	Tue	Konkani	South Asia	1548-trm
0000-0015	Wed/Thu	Khurukh	South Asia	9520-nau
0000-0015	Wed-Sun	Kannada	South Asia	1548-trm
0015-0030	Fri	Ho	South Asia	9520-nau
0015-0030	Mon	Banjara	South Asia	1548-trm
0015-0030	Mon/Tue	Chakma	South Asia	9520-nau
0015-0030	Sat/Sun	Bengali	South Asia	9520-nau
0015-0030	Tue	Koya	South Asia	1548-trm
0015-0030	Wed/Thu	Santhali	South Asia	9520-nau
0015-0030	Wed-Sun	Telugu	South Asia	1548-trm
0030-0045	Daily	Malayalam	South Asia	1548-trm
0030-0045	Fri	Bundelkhandi	South Asia	7215-nau
0030-0045	Mon/Tue	Bagri	South Asia	7215-nau
0030-0045	Sat/Sun	Garhwali	South Asia	7215-nau
0030-0045	Thu	Vasavi	South Asia	7215-nau
0030-0045	Wed	Khariya	South Asia	7215-nau
0045-0100	Mon/Tue	Rajasthani	South Asia	7215-nau
0045-0100	Sat/Sun	Kangri	South Asia	7215-nau
0045-0100	Thu/Fri	Dogri	South Asia	7215-nau
0045-0100	Wed	Magahi	South Asia	7215-nau
0100-0115	Mon/Tue	Marwari	South Asia	7215-nau
0100-0115	Sat/Sun	Kinnauri	South Asia	7215-nau

Times/UTC	Days	Language	Target	kHz
0100-0115	Thu/Fri	Punjabi	South Asia	7215-nau
0100-0115	Wed	Sindhi	South Asia	7215-nau
0115-0130	Fri	Varli	South Asia	7215-nau
0115-0130	Mon	Bhili	South Asia	7215-nau
0115-0130	Thu	Vadari	South Asia	7215-nau
0115-0130	Tue	Kukna	South Asia	7215-nau
0115-0130	Wed	Kotwali	South Asia	7215-nau
1230-1245	Fri-Sun	Oriya	South Asia	15285-nau
1230-1245	Mon	Gojri	South Asia	15285-nau
1230-1245	Tue	Ladakhi	South Asia	15285-nau
1230-1245	Wed/Thu	Kashmiri	South Asia	15285-nau
1245-1300	Mon-Wed	Punjabi	South Asia	15285-nau
1245-1300	Sat/Sun	Koya	South Asia	15285-nau
1245-1300	Thu/Fri	Gujarati	South Asia	15285-nau
1300-1315	Daily	Nepali	South Asia	15285-nau
1315-1330	Mon	Santhali	South Asia	15285-nau
1315-1330	Sat/Sun	Hindi	South Asia	15285-nau
1315-1330	Thu/Fri	Marathi	South Asia	15285-nau
1315-1330	Tue	Vadari	South Asia	15285-nau
1315-1330	Wed	Khandesi	South Asia	15285-nau
1330-1345	Fri	Malto	South Asia	15285-nau
1330-1345	Fri/Sat	Kui	South Asia	1548-trm
1330-1345	Fri/Sat	Tangkhul	South Asia	15235-nau
1330-1345	Mon/Tue	Nockte	South Asia	15235-nau
1330-1345	Mon-Wed	Marathi	South Asia	1548-trm
1330-1345	Mon-Wed	Meitei	South Asia	15285-nau
1330-1345	Sat	Tibetan	South Asia	15285-nau
1330-1345	Sun	Burmese	South Asia	1548-trm
1330-1345	Sun	Rongmei	South Asia	15235-nau
1330-1345	Sun	Tibetan	South Asia	15285-nau
1330-1345	Thu	Chowdhari	South Asia	1548-trm
1330-1345	Thu	Malto	South Asia	15285-nau
1330-1345	Wed/Thu	Tharu	South Asia	15235-nau
1345-1400	Fri/Sat	Oriya	South Asia	1548-trm
1345-1400	Fri/Sat	Urdu	South Asia	15285-nau
1345-1400	Mon/Tue	Chhattisgarhi	South Asia	1548-trm
1345-1400	Mon/Tue	Kokborok	South Asia	15235-nau
1345-1400	Mon/Tue	Marwari	South Asia	15285-nau
1345-1400	Sat/Sun	Thadou-Kuki	South Asia	15235-nau
1345-1400	Sun	Chin	South Asia	1548-trm
1345-1400	Sun	Netakani	South Asia	15285-nau
1345-1400	Thu/Fri	Deori	South Asia	15235-nau
1345-1400	Wed	Kaubru	South Asia	15235-nau
1345-1400	Wed/Thu	Deshiya	South Asia	15285-nau
1345-1400	Wed/Thu	Gujarati	South Asia	1548-trm
1400-1415	Fri	Gondi	South Asia	15285-nau
1400-1415	Fri	Sambalpur	South Asia	1548-trm
1400-1415	Mon/Tue	Halam	South Asia	15235-nau
1400-1415	Mon/Tue	Soura	South Asia	15285-nau
1400-1415	Mon-Wed	Santhali	South Asia	1548-trm
1400-1415	Sat	Ao	South Asia	15235-nau
1400-1415	Sat	Yerukala	South Asia	15285-nau
1400-1415	Sat/Sun	Kokborok	South Asia	1548-trm
1400-1415	Sun	Kupiya	South Asia	15285-nau
1400-1415	Sun	Sumi	South Asia	15235-nau
1400-1415	Thu	Bhili	South Asia	15285-nau
1400-1415	Thu	Gamit	South Asia	1548-trm
1400-1415	Thu/Fri	Karbi	South Asia	15235-nau
1400-1415	Wed	Bondo	South Asia	15285-nau
1400-1415	Wed	Rengma	South Asia	15235-nau
1415-1430	Fri	Kukna	South Asia	15285-nau
1415-1430	Fri/Sat	Bhojpuri	South Asia	1548-trm
1415-1430	Mon	Khota	South Asia	1548-trm
1415-1430	Mon/Tue	Kui	South Asia	15285-nau

Times/UTC	Days	Language	Target	kHz
1415-1430	Mon/Tue	Santhali	South Asia	15235-nau
1415-1430	Sat/Sun	Banjara	South Asia	15285-nau
1415-1430	Sat/Sun	Garo	South Asia	15235-nau
1415-1430	Sun	Chakma	South Asia	1548-trm
1415-1430	Thu	Kotwalia	South Asia	1548-trm
1415-1430	Tue	Malto	South Asia	1548-trm
1415-1430	Wed	Khariya	South Asia	1548-trm
1415-1430	Wed/Thu	Gamit	South Asia	15285-nau
1415-1430	Wed-Fri	Mising	South Asia	15235-nau
1430-1445	Fri	Kotwalia	South Asia	15285-nau
1430-1445	Fri/Sat	Magahi	South Asia	1548-trm
1430-1445	Mon/Tue	Sambalpur	South Asia	15285-nau
1430-1445	Mon-Tue	Khurukh	South Asia	1548-trm
1430-1445	Mon-Wed	Dzongkha	South Asia	15235-nau
1430-1445	Sat/Sun	Haryanvi	South Asia	15350-nau
1430-1445	Sat/Sun	Khasi	South Asia	15235-nau
1430-1445	Sun	Halam	South Asia	1548-trm
1430-1445	Thu	Kukna	South Asia	1548-trm
1430-1445	Thu	Mouchi	South Asia	15285-nau
1430-1445	Thu/Fri	Konyak	South Asia	15235-nau
1430-1445	Wed	Mundari	South Asia	1548-trm
1430-1445	Wed	Varti	South Asia	15285-nau
1445-1500	Fri	Soura	South Asia	1548-trm
1445-1500	Mon/Tue	Sadri	South Asia	1548-trm
1445-1500	Mon-Fri	Hindi	South Asia	15285-nau
1445-1500	Mon-Wed	Sarchopa	South Asia	15235-nau
1445-1500	Sat/Sun	Bhaojpuri	South Asia	15285-nau
1445-1500	Sat/Sun	Hindi	South Asia	1548-trm
1445-1500	Sat/Sun	Tibetan	South Asia	15235-nau
1445-1500	Thu	Vasavi	South Asia	1548-trm
1445-1500	Thu/Fri	Newari	South Asia	15235-nau
1445-1500	Wed	Ho	South Asia	1548-trm
1500-1515	Fri-Sun	Hindi	South Asia	1548-trm
1500-1515	Mon	Sherpa	South Asia	15235-nau
1500-1515	Sat/Sun	Meitei	South Asia	15235-nau
1500-1515	Thu/Fri	Magahi	South Asia	15235-nau
1500-1515	Tue/Wed	Lepcha	South Asia	15235-nau
1515-1530	Fri-Sun	Bengali	South Asia	15235-nau
1515-1530	Mon/Tue	Tamang	South Asia	15235-nau
1515-1530	Mon-Fri	Bengali	South Asia	1548-trm
1515-1530	Sat/Sun	Urdu	South Asia	1548-trm
1515-1530	Wed/Thu	Mundari	South Asia	15235-nau
1530-1545	Mon/Tue	Chhattisgari	South Asia	15150-nau
1530-1545	Sat/Sun	Sindhi	South Asia	15150-nau
1530-1545	Wed-Fri	Maithili	South Asia	15150-nau
1545-1600	Mon/Tue	Bundelkhandi	South Asia	15150-nau
1545-1600	Wed-Fri	Bagheli	South Asia	15150-nau
1545-1615	Sat	Dari	South Asia	15150-nau
1545-1615	Sun	Pashto	South Asia	15150-nau
1600-1615	Mon-Wed	Awadhi	South Asia	15150-nau
1600-1615	Thu/Fri	Sadri	South Asia	15150-nau
1615-1630	Daily	Hindi	South Asia	15150-nau

Mediumwave stations in South Asia

Entries marked in blue are DRM transmissions

kHz	ITU	Station	Location	kW	Schedule (UTC)
531	IND	All India Radio	Jodhpur, Rajasthan	300	0025-0415(0530su), 0630-0945, 1130-1740
540	IND	All India Radio	Aizawl, Mizoram	20	0025-0400, 0700-0930(1000su) 1130-1630
	PAK	Radio Pakistan	Peshawar, Khyber-Pak'hwa	300	0045-0405, 0600-1810 in Urdu/English
549	IND	All India Radio	Ranchi, Jharkhand	100	0025-0445(0455su), 0630-1000(1741su), 1100-1741
558	BNG	Bangladesh Betar	Khulna	100	0030-0400, 0600-1710 in Bengali/English
	IND	All India Radio	Mumbai, Maharashtra	100	Asmita Ch: 2355-1035, 1130(1200su)-1800
	IND	All India Radio	Ranchi, Jharkhand		DRM: FM Rainbow, Delhi
567	IND	All India Radio	Dibrugarh, Assam	300	0000-0505(0550su), 0630-0930, 1000-1700
	PAK	Radio Pakistan	Khuzdar, Baluchistan	300	1155-1810 in Urdu/English / (1740su)
	IND	All India Radio	Mumbai, Maharashtra		DRM: DTH Marathi
576	IND	All India Radio	Alappuzha, Kerala	200	0020-0430(0630sa/su), 0630-1000(1130sa/su), 1130-1740
	NPL	Radio Nepal	Surkhet, Mid-Western	100	2315-1747 in Nepali/others, except for BBC relay 1600-1730 in Nepali/English
	IND	All India Radio	Dibrugarh, Assam		DRM: Vividh Bharati, Mumbai
585	IND	All India Radio	Nagpur, Maharashtra	300	-0500, 0700-, 1130(1200su)-1740
	PAK	Radio Pakistan	Islamabad, CT	500	0045-0700, 0800-1900 in Urdu/English
594	IND	AIR Chinsurah	Chinsurah, West Bengal	1000	0030-0230 Akashvani Moitree in Bengali 0230-0245 Home News in Hindi 0245-0300 Home News in English 0300-0830 Akashvani Moitree in Bengali 0830-0845 Home News in English 0845-0900 Home News in Hindi 1000-1515 Akashvani Moitree in Bengali 1515-1530 Home News in Hindi 1530-1545 Home News in English 1545-1600 Spotlight in English 1600-1730 Akashvani Moitree in Bengali
603	IND	All India Radio	Ajmer, Rajasthan	200	0025-1200, 1330-1740
	IND	AIR Chinsurah	Chinsurah, West Bengal	DRM	0030-0130 FM Rainbow, Delhi 0130-0230 External Sce in Nepali 0230-0700 FM Rainbow, Delhi 0700-0800 External Sce in Nepali 0800-0900 FM Rainbow, Delhi 1000-1100 GOS-II in English 1100-1215 FM Rainbow, Delhi 1215-1315 External Sce in Burmese 1315-1330 FM Rainbow, Delhi 1330-1430 External Sce in Nepali 1430-1730 FM Rainbow, Delhi note: FM Rainbow not always regular
612	IND	All India Radio	Banguluru, Karnataka	200	0025-0435(0530su), 0700-0935, 1200-1735
	IND	All India Radio	Ajmer, Rajasthan		DRM: FM Rainbow, Delhi
621	IND	All India Radio	Patna, Bihar	100	0025-1200, 1245-1742
	IND	All India Radio	Banguluru, Karnataka		DRM: FM Gold, Delhi
630	BNG	Bangladesh Betar	Savar, Dhaka-B	100	0000-0145, 0300-1710, 1800-2100 in Beng/Eng
	IND	All India Radio	Thrissur, Kerala	100	-0345, 0625-0900, 1130-1735
	PAK	Radio Pakistan	Lahore, Punjab	100	0200-1900 in Urdu/English
	IND	All India Radio	Patna, Bihar		DRM: FM Rainbow, Delhi
639	IND	All India Radio	Kohima, Nagaland	100	2359-0520, 0700-0900, 0930-1600
	PAK	Radio Pakistan	Karachi, Sindh	100	NCAC: 0200-1900 in Urdu/English
648	IND	All India Radio	Indore, Madhya Pradesh	200	0025-0430, 0700-0935, 1130-1740
	NPL	Radio Nepal	Dhankuta, Eastern	100	2315-1715 in Nepali/others
657	IND	All India Radio	Kolkata, West Bengal	200	0023-0530, 0630-1030, 1100-1740
666	IND	All India Radio	Delhi, NCT	100	Rajdhani Channel: 0025-0440, 0700-, -1835
	IND	All India Radio	Kolkata, West Bengal		DRM: FM Gold, Delhi
675	IND	All India Radio	Bhadravathi, Karnataka	20	0025-0500, 0700(0600su)-0935, 1200-1740
	IND	All India Radio	Chhatarpur, Madhya Prad.	100	0025-0430(0600su), 0700-0945, 1130-1740
	IND	All India Radio	Itanagar, Arunachal Prad.	100	0020-0400, 0700-0900, 1000-1630

kHz	ITU	Station	Location	kW	Schedule (UTC)
684	IND	All India Radio	Kargil, Jammu & Kashmir	200	1130-1630
	IND	All India Radio	Kozhikode, Kerala	100	0013-0400, 0658-0930, 1108-1735
	IND	All India Radio	Port Blair, Andaman Is.	100	2355-0300, 0315-0900, 1030-1700(1730ss)
	NPL	Radio Nepal	Pokhara, Western	100	2315-1715 in Nepali/others
	IND	All India Radio	Itanagar, Arunachal Pradesh		DRM: FM Rainbow, Delhi
693	BNG	Bangladesh Betar	Dhamrai, Dhaka-A	100	0030-0610, 0830-1710 in Bengali/English
702	IND	AIR External Sce	Jalander, Punjab	200	0015-0430 in Urdu, 0800-0830 in Punjabi, 0830-1130 in Urdu, 1130-1230 in Punjabi, 1230-1300 in Saraiki, 1300-1430 in Punjabi, 1430-1930 in Urdu
711	IND	All India Radio	Siliguri, West Bengal	194	0025-0430(0500su), 0630-1000, 1145-1742
	PAK	Radio Pakistan	DI Khan, Khyber-Pak'hwa	100	0200-1900 in Urdu/English
720	IND	All India Radio	Chennai, Tamil Nadu	200	0030-0530, 0630-1200, 1230-1740
	IND	All India Radio	Siliguri, West Bengal	6	DRM: FM Rainbow, Delhi
729	IND	All India Radio	Guwahati, Assam	100	0000-0415, 0600-0930, 0945-1145, 1200-1740
	IND	All India Radio	Chennai, Tamil Nadu		DRM: Raagam Channel
738	IND	All India Radio	Hyderabad, Telengana	200	0023-1740
747	IND	All India Radio	Lucknow, Uttar Pradesh	300	0023-0430, 0658-1000, 1213-1741
756	IND	All India Radio	Jagdalpur, Chhattisgarh	100	0025-0405(0430su), 0600-0930, 1200-1740
	PAK	Radio Pakistan	Yaru, Quetta, Baluchistan	100	0045-0805 and 1000-1810 in Urdu/English
	IND	All India Radio	Lucknow, Uttar Pradesh		DRM: FM Gold, Delhi
765	IND	All India Radio	Dharwad, Karnataka	200	0030-0430, 0600-1005, 1200-1735
774	IND	All India Radio	Shimla, Himachal Pradesh	100	0025-0410, 0700-0930, 1050-1740
	IND	All India Radio	Dharwad, Karnataka		DRM: FM Rainbow, Delhi
783	IND	All India Radio	Chennai, Tamil Nadu		DRM: Ch 1 Vividh Bharati/Ch 2 FM Rainbow
792	IND	All India Radio	Pune, Maharashtra	100	0025-0525, 0700-1000, 1200-1740
	NPL	Radio Nepal	Kathmandu, Central	100	2315-1715 in Nepali/others
	PAK	Azad Kashmir R	Muzzaffarabad	150	transmitter is currently inactive
801	IND	All India Radio	Jabalpur, Madhya Pradesh	200	0025-0500, 0630-0945, 1130-1740
	IND	All India Radio	Pune, Maharashtra		DRM: FM Rainbow, Delhi
810	IND	All India Radio	Rajkot, Gujarat	300	0025-0430, 0700-, - 1740
	NPL	Radio Nepal	Dipayal, Far Western	10	2315-1715 in Nepali/others
	IND	All India Radio	Jabalpur, Madhya Pradesh		DRM: FM Rainbow, Delhi
819	BNG	Bangladesh Betar	Dhaka	100	Testing
	IND	All India Radio	Delhi, NCT	200	Indraprastha Channel: 0430-, -1045, 1125-1840
	IND	All India Radio	Rajkot, Gujarat		DRM: FM Rainbow, Delhi
828	IND	All India Radio	Goa, Panaji	20	Vividh Bharati: 0025-0435, 0530-1200, 1245-1740
	IND	All India Radio	Silchar, Assam	20	schedule to be confirmed
	PAK	Radio Pakistan	Karachi, Sindh	100	0045-0405, 0600-1900 in Urdu/English
	IND	All India Radio	Delhi, NCT		DRM: FM Gold, Delhi
837	IND	All India Radio	Vijayawada, Andhra Pradesh	100	0025-0530, 0630-1200, 1245-1742
846	BNG	Bangladesh Betar	Rajshahi	100	0030-0400, 0600-1710 in Bengali/English
	IND	All India Radio	Ahmedabad, Gujarat	200	0025-1200, 1245-1742
	IND	All India Radio	Vijayawada, Andhra Prad.		DRM: FM Gold, Delhi
855	IND	All India Radio	Ahmedabad, Gujarat		DRM: FM Rainbow, Delhi
864	IND	All India Radio	Shillong, Meghalaya	100	0025-0430, 0700-1000, 1130-1630
873	BNG	Bangladesh Betar	Chittagong	100	0030-0400, 0600-1710 in Bengali/English
	CLN	Sri Lanka BC	Puttalam, NW Province	400	available for hire by other broadcasters
	IND	All India Radio	Jalandhar, Punjab	300	0025-0430, 0630-0930, 1030-1740
882	CLN	TWR Radio 882	Puttalam, NW Province	400	1200-1730 & 2230-0130 in S Asian langs/Eng
	IND	All India Radio	Imphal, Manipur	300	0000-0500, 0630-1000, 0930-1600
	IND	All India Radio	Jalandhar, Punjab		DRM: FM Gold, Delhi
891	IND	All India Radio	Rampur, Uttar Pradesh	20	0025-0430, 0700(0630su)-0940, 1230-1742
900	IND	All India Radio	Kadapa, Andhra Pradesh	100	0030-, 1130-1742
909	IND	All India Radio	Gorakhpur, Uttar Pradesh	100	schedule to be confirmed
918	IND	All India Radio	Suratgarh, Rajasthan	300	0025-0350(0445su), 0700-0940, 1130-1740
927	IND	All India Radio	Vishakapatnam, Andhra Pr.	100	0030-0430, 0545-0930, 1130-1740
	IND	All India Radio	Suratgarh, Rajasthan		DRM: Vividh Bharati, Mumbai
936	IND	All India Radio	Tiruchirapalli, Tamil Nadu	100	0015-0415(0530su), 0610-0915(1130su), 1200-1735
	PAK	Azad Kashmir R	Mirpir	100	0045-0515, 1100-1810 in Urdu/Eng/local
945	IND	All India Radio	Sambalpur, Odisha	100	0000-0435, 0630-1000, 1130-1735
	IND	All India Radio	Tiruchirapalli, Tamil Nadu		DRM: Vividh Bharati, Chennai
954	IND	All India Radio	Najibabad, Uttar Pradesh	200	0630-0930, 1130-1740

kHz	ITU	Station	Location	kW	Schedule (UTC)
963	BNG	Bangladesh Betar	Sylhet	20	0030-0400 and 0800-1710 in Bengali/English
	IND	All India Radio	Jalgaon, Maharashtra	20	0700-, 1200-, -1740
972	IND	All India Radio	Cuttack, Odisha	300	0023-0436(0500sa), 0658-1000, 1123-1735
981	IND	All India Radio	Raipur, Chhattisgarh	100	0023-0930, 1128-1740
	PAK	Radio Pakistan	Turbat, Baluchistan	100	new transmitter in 2012, status unconfirmed
990	IND	All India Radio	Jammu, Jammu & Kashmir	300	0025-0445, 0630-0930, 1130-1740
999	BNG	Bangladesh Betar	Thakurgaon	10	0950-1710 in Bengali/English
	IND	All India Radio	Almora, Uttarakhand	1	schedule to be confirmed
	IND	All India Radio	Coimbatore, Tamil Nadu	20	0020-0400, 0610(0630su)-0935(1100su), 1200-1735
	IND	All India Radio	Jammu, Jammu & Kashmir		DRM: FM Rainbow, Delhi
1008	IND	All India Radio	Kolkata, West Bengal	100	0025-0445/0515v, 0700/0730-, 1130-1740
	PAK	Radio Pakistan	Hyderabad, Sindh	120	0045-0405, 0600-1900 in Urdu/English
1017	IND	All India Radio	Chennai, Tamil Nadu	20	0030-0530, 0630-1200, 1230-1740
	IND	All India Radio	Kolkata, West Bengal		DRM: FM Rainbow
1026	IND	All India Radio	Allahabad, Uttar Pradesh	20	0020-0435(1000su), 0625-1000, 1130-1742
1035	IND	All India Radio	Guwahati, Assam	20	0000-0345, 0600(0530su)-0930(0900su), 0945-1700
	PAK	Radio Pakistan	Multan, Punjab	100	0045-0430 and 0600-1800 in Urdu/English
1044	IND	All India Radio	Mumbai, Maharashtra	100	Samvadita Channel: 0025-0440/0530, 0600/0630-0900, 1130-1741
	IND	All India Radio	Guwahati, Assam		DRM: FM Rainbow, Delhi
1053	BNG	Bangladesh Betar	Rangpur	10	0030-0400, 0800-1710 in Bengali/English
	IND	AIR External Sce	Tuticorin, Tamil Nadu	200	0000-0045 in Tamil, 0045-0115 in Sinhala, 0115-0330 in Tamil, 1000-1100 in English, 1100-1300 in Tamil, 1300-1500 in Sinhala, 1500-1530 in Tamil, 1530-1600 Home News in English
	IND	All India Radio	Leh, Jammu & Kashmir	20	0130-0630, 0700-0930, 1200-1700
	IND	All India Radio	Mumbai, Maharashtra		DRM: DTH Hindi
1062	IND	All India Radio	Pasighat, Arunachal Prad.	10	1030-1630
1071	IND	AIR External Sce	Rajkot, Gujarat	1000	0015-0100 in Urdu, 0100-0200 in Sindhi, 0200-0430 in Urdu, 0830-1230 in Urdu, 1230-1500 in Sindhi, 1500-1600 Baluchi, 1600-1930 Urdu
	IND	All India Radio	Pasighat, Arunachal Pradesh		DRM: Vividh Bharati, Mumbai
1080	BNG	Bangladesh Betar	Rajshahi	10	0030-0400, 0600-1710 in Bengali/English
	IND	All India Radio	Rajkot, Gujarat		DRM: 0015-0430 Prog 1 VB; Prog 2 Urdu 0100-0200 Prog 1 VB; Prog 2 Sindhi 0200-0430 Prog 1 VB; Prog 2 Urdu 0630-0815 Prog 1 VB; Prog 2 Urdu 0830-1230 Prog 1 VB; Prog 2 Urdu 1230-1500 Prog 1 VB; Prog 2 Sindhi 1500-1600 Prog 1 VB; Prog 2 Baluchi 1600-1930 Prog 1 VB; Prog 2 Urdu
1089	IND	All India Radio	Naushera, Jammu & Kash.	20	schedule to be confirmed
	IND	All India Radio	Udupi, Karnataka	20	0025-0500, 0700(0600su)-0935, 1200-1740
1107	IND	All India Radio	Gulbarga, Karnataka	20	-0400, 0700-0930, 1200-1738
1116	IND	All India Radio	Srinagar, Jammu & Kashmir	300	schedule to be confirmed
1125	CLN	Sri Lanka BC	Puttalam, NW Province	50	0930-1000 Telugu, 1000-1100 Malayalam, 1100-1215 Tamil; subject to confirmation
	IND	All India Radio	Tezpur, Assam	20	-1600
	IND	All India Radio	Udaipur, Rajasthan	20	-1741
	PAK	Radio Pakistan	Quetta, Baluchistan	100	NCAC: 0200-1900 in Urdu/English
1143	IND	All India Radio	Ratnagiri, Maharashtra	20	-1741
	IND	All India Radio	Rohtak, Haryana	20	0023-0435, 0630-0930, 1130-1740
	NPL	Radio Nepal	Bardibas, Central	10	2315-1715 in Nepali/others
1152	IND	All India Radio	Kavaratti, Lakshadeep	10	relay AIR Thiru'puram; local prgrs 0050-0330
	PAK	Radio Pakistan	Rawalpindi, Punjab	100	NCAC: 0200-1900 in Urdu/English
1161	BNG	Bangladesh Betar	Rangamati	10	0530-1030 in Bengali/English
	IND	All India Radio	Thiru'puram, Kerala	20	0020-0430(1740sa/su), 0630-1000, 1130-1740
1170	BNG	Bangladesh Betar	Kallyanpur, Dhaka-C	20	0900-1100 in Bengali/English
	IND	All India Radio	Hyderabad, Telengana	1	stand-by for 738 kHz
	PAK	Radio Pakistan	Peshawar, Khyber-Pak'hwa	100	NCAC: 0200-1900 in Urdu/English

kHz	ITU	Station	Location	kW	Schedule (UTC)
1179	IND	All India Radio	Rewa, Madhya Pradesh	20	schedule to be confirmed
1188	IND	All India Radio	Mumbai, Maharashtra	50	Vividh Bharati: 0025-1200, 1245-1800
1197	IND	All India Radio	Shillong, Meghalaya	1	schedule to be confirmed
	IND	All India Radio	Tirunelveli, Tamil Nadu	20	0023-0430, 0610-1030, 1123-1735
1206	IND	All India Radio	Bhawanipatra, Odisha	200	0025-0435, 0700-0945, 1130-1735
1215	IND	All India Radio	Delhi, NCT	20	National Channel: 1325-0040
	IND	All India Radio	Puducherry, Puducherry	20	0015-0415(0430su), 0610-0930(1030su), 1200-1735v
1224	IND	All India Radio	Srinagar, Jammu & Kashmir	10	Yuv Vani Channel: 0105-1205, 1245-1740
1233	IND	All India Radio	Tura, Meghalaya	20	0025-0335(0430su), 0630-1130, 1228-1545
1242	IND	All India Radio	Varanasi, Uttar Pradesh	100	0025-0435, 0630-0930, 1130-1740
1251	IND	All India Radio	Sangli, Maharashtra	20	0020-0430, 0700-0930, 1200-1740
	PAK	Radio Pakistan	Loralai, Baluchistan	10	1145-1615 in Urdu/English
	IND	All India Radio	Varanasi, Uttar Pradesh		DRM: Vividh Bharati, Mumbai
1260	IND	All India Radio	Ambikapur, Madhya Pradesh	20	schedule to be confirmed
	PAK	Radio Pakistan	Peshawar, Khyber-Pak'hwa	400	schedule to be confirmed
1269	IND	All India Radio	Agartala, Tripura	20	schedule to be confirmed
	IND	All India Radio	Madurai, Tamil Nadu	20	0015-0345, 0610(0630su)-0900(1100su), 1200-1733
1287	BNG	Bangladesh Betar	Barisal	10	0445-1115 in Bengali/English
	IND	All India Radio	Panaji, Goa	100	0630-, 1200-1742
1296	IND	All India Radio	Darbhanga, Bihar	10	schedule to be confirmed
	IND	All India Radio	Panaji, Goa		DRM: FM Gold
1305	IND	All India Radio	Parbhani, Maharashtra	10	0020-0432, 0700-0830, 1200-1741
1314	BNG	Bangladesh Betar	Cox's Bazar	10	0545-1045 in Bengali/English
	IND	All India Radio	Bhuj, Gujarat	10	schedule to be confirmed
1332	IND	All India Radio	Tezu, Arunachal Pradesh	10	schedule to be confirmed
	PAK	Radio Pakistan	Lahore, Punjab	100	NCAC: 0200-1900 in Urdu/English
1341	IND	All India Radio	Kohima, Nagaland	1	0000-0510, 0700-0900, 1000-1600/1630/1700
	PAK	Radio Pakistan	Bahawalpur, Punjab	10	0850-1810 in Urdu/English
1350	IND	All India Radio	Kupwara, Jammu & Kashmir	20	0025-0505, 0930-1630(1730sa); relay Srinagar
1368	IND	All India Radio	Delhi, NCT	20	DRM: 0025-0530, 0630-1200, 1245-1740: Ch1 Vividh Bharati / Ch 2 FM Rainbow
1377	IND	All India Radio	Hyderabad, Andhra Pradesh	20	-0415, 0730/0800-0930, 1200-1735
1386	IND	All India Radio	Gwalior, Madhya Pradesh	20	-0405, -0930, 1130-
1395	IND	All India Radio	Bikaner, Rajasthan	20	schedule to be confirmed
1404	IND	All India Radio	Gangtok, Sikkim	20	0100-0400, 1030-1600
	IND	All India Radio	Bikaner, Rajasthan		DRM: Vividh Bharati, Mumbai
1413	BNG	Bangladesh Betar	Comilla	10	1000-1710 in Bengali/English
	IND	All India Radio	Kota, Rajasthan	20	0630-0930
1431	BNG	Bangladesh Betar	Bandorban	10	0530-1030 in Bengali/English
1440	IND	All India Radio	Kurseong, West Bengal	1	0055-0430, 0620-1030, 1130-1700(-1741sa/su)
1449	MLD	Voice of Maldives	Malé	10	24h in Dhivehi, except 1300-1315 in English
	PAK	Radio Pakistan	Zhob, Baluchistan	10	1155-1600 in Urdu/English
1458	IND	All India Radio	Barmer, Rajasthan	20	schedule to be confirmed
	IND	All India Radio	Bhagalpur, Bihar	20	0020-0425(0435su), 0630-0955(1025su), 1130-1730
1467	IND	All India Radio	Jeypore, Odisha	100	0025-0440(0445su), 0700-1000, 1145-1741
	IND	All India Radio	Barmer, Rajasthan		DRM: Vividh Bharati, Mumbai
1476	IND	All India Radio	Jaipur, Rajasthan	1	0025-0400(0600su), 0630-0931, 1130-1741
	PAK	Radio Pakistan	Faisalabad, Punjab	10	0045-0820 in Urdu/English
1485	IND	All India Radio	Ahwa, Gujarat	1	1200-1600
	IND	All India Radio	Chamoli, Uttarakhand	1	schedule to be confirmed
	IND	All India Radio	Drass, Jammu & Kashmir	1	Vividh Bharati: 1030-1630
	IND	All India Radio	Dunagrpur, Rajasthan	1	schedule to be confirmed
	IND	All India Radio	Joranda, Odisha	1	0530-1740
	IND	All India Radio	Khalsi, Jammu & Kashmir	1	1200-1700; relay AIR Leh
	IND	All India Radio	Nongstoin, Meghalaya	1	0925-1300
	IND	All India Radio	Nyoma, Jammu & Kashmir	1	Vividh Bharati: schedule to be confirmed
	IND	All India Radio	Soro, Odisha	1	schedule to be confirmed
1512	IND	All India Radio	Kokrajhar, Assam	20	1230-1600
	PAK	Radio Pakistan	Gilgit, Northern Areas	10	1000-1700 in Urdu/English
1521	IND	All India Radio	Tawang, Arunachal Pradesh	20	schedule to be confirmed

kHz	ITU	Station	Location	kW	Schedule (UTC)
1530	IND	All India Radio	Agra, Uttar Pradesh	20	-0400, 0700-, 1200-1740
	IND	All India Radio	Tawang, Arunachal Pradesh		DRM: Vividh Bharati, Mumbai
1548	CLN	Sri Lanka BC	Trincomalee, Eastern Prov.	400	available for hire by other broadcasters
1557	PAK	Radio Pakistan	Skardu, Northern Areas	10	1000-1700 in Urdu/English
1566	IND	All India Radio	Nagpur, Maharashtra	1000	National Channel: 1325-0040
1584	IND	All India Radio	Diphu, Assam	1	schedule to be confirmed
	IND	All India Radio	Himmat Nagar, Gujarat	1	schedule to be confirmed
	IND	All India Radio	Jamshedpur, Jharkhand	1	0025-0400(1200su), 0700-1000, 1130(1245su)-1740
	IND	All India Radio	Kalpa, Himachal Pradesh	1	schedule to be confirmed
	IND	All India Radio	Kargil, Jammu & Kashmir	1	1130-1630
	IND	All India Radio	Kavaratti, Lakshadweep	1	-1735; relays AIR Thiru'puram
	IND	All India Radio	Keonjhar, Odisha	1	0025-0430, 0630-1130, 1200-1630
	IND	All India Radio	Kota, Rajasthan	1	0025-0400, 1130-1740
1584	IND	All India Radio	Mathura, Uttar Pradesh	1	0025-0430, 0700-0930, 1200(1130su)-1740
	IND	All India Radio	Mon, Nagaland	1	schedule to be confirmed
	IND	All India Radio	Padam, Jammu & Kashmir	1	Vividh Bharati: schedule to be confirmed
	PAK	Radio Pakistan	Chitral, Khyber-Pak'hwa	0.25	1050-1515 in Urdu/English
	PAK	Radio Pakistan	Sibi, Baluchestan	0.25	0755-1108 in Urdu/English
1593	IND	All India Radio	Bhopal, Madhya Pradesh	10	0025-0530, 0630-0930, 1130-1740
1602	IND	All India Radio	Diskit, Jammu & Kashmir	1	Vividh Bharati: 1200-1700
	IND	All India Radio	Pauri, Uttarakhand	1	1125-1600
	IND	All India Radio	Pithoragarh, Uttarakhand	1	schedule to be confirmed
	IND	All India Radio	Saiha, Mizoram	1	0930-1330
	IND	All India Radio	Tiersuru, Jammu & Kashmir	1	1030-1630
	IND	All India Radio	Tuensang, Nagaland	1	schedule to be confirmed
	IND	All India Radio	Udhag'dalam, Tamil Nadu	1	1130-, - 1700
	IND	All India Radio	Uttarkashi, Uttarakhand	1	schedule to be confirmed
	IND	All India Radio	Varanasi, Uttar Pradesh	1	Vividh Bharati: -0435, 0630-1200, 1245-1740
	IND	All India Radio	William Nagar, Meghalaya	1	0925-1330
	IND	All India Radio	Ziro, Arunachal Pradesh	1	schedule to be confirmed

British DX Club

South Asia on Mediumwave and Shortwave

Compiled by Tony Rogers
with thanks to members of the British DX Club

also acknowledging: DX-India, Aoki (NDXC), BC-DX, DX Listening Digest,
DXing.info, DXplorer, DX Mix-Bulgaria, HFCC, and Steve Lare.

Please send up-dates and corrections by email to:
tony@bdxc.org.uk

DX India

For complete and up-to-date details of Indian radio stations
broadcasting on shortwave, see Jose Jacob's highly recommended
"DX India" website at www.qsl.net/vu2jos